


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00011	Connector, dc plug, 5.5x2.5xBL7.5xL30 locking style, brass nickel plated, threaded nut 5/16-32	2	
2	30-00004	Wire, 1C BC, 18 AWG, UL1185, 300V, 80C, 3.4 mm, shielded, VW-1, PVC	1	
3	24-00017	Overmold, PVC	2	

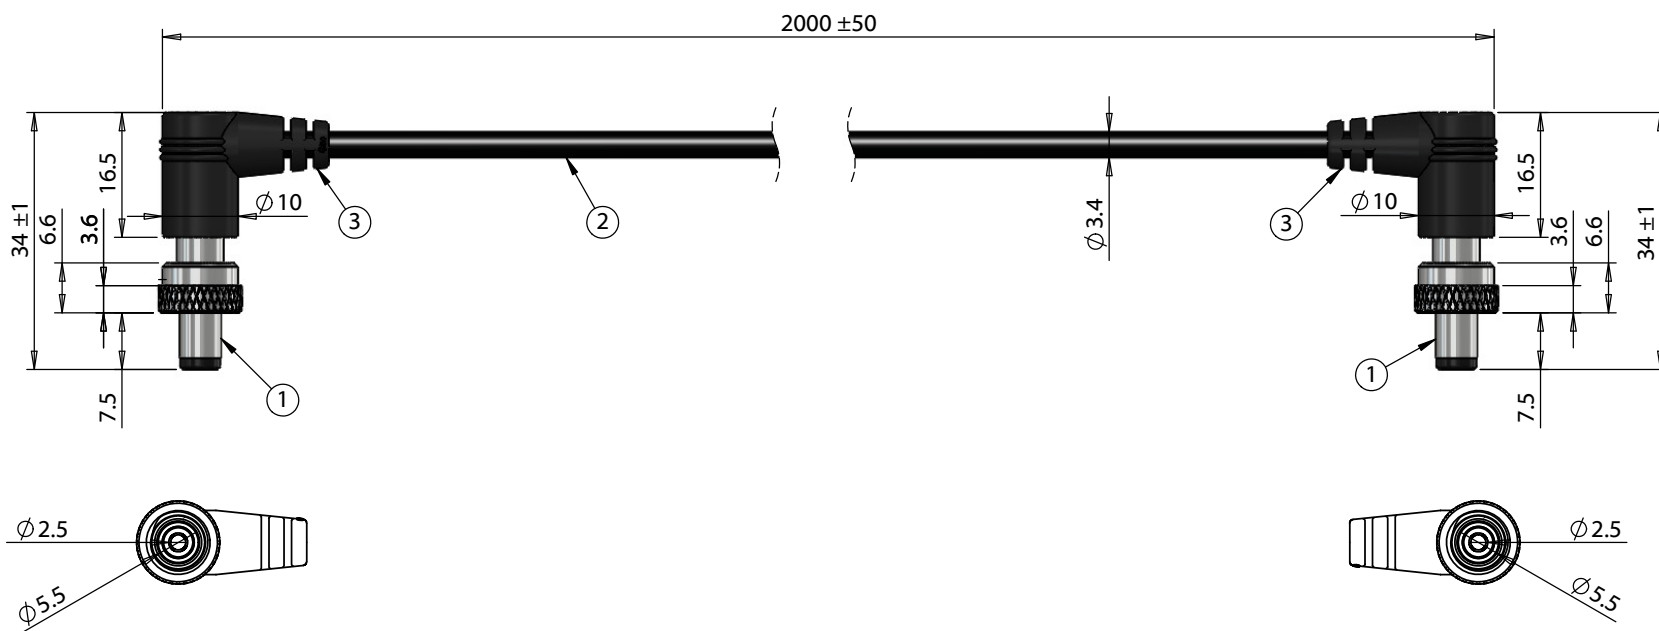

Ratings

Maximum Operating Voltage: 48 Vdc
Maximum Operating Current: 6.5 A
Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Operating Temperature Range

-25 ~ 80 °C, relative humidity of 85% or less

Wiring Diagram

50-00011	wire color	50-00011
center	white	center
sleeve	shield	sleeve

Revision:	Date:	Description:	Prepared: CR Digitally signed by CR Date: 2026.02.04 14:05:34 -08'00'	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	5/28/2009	Initial release	Verified: KM Digitally signed by KM Date: 2026.03.05 16:10:05 -08'00'	RoHS and REACH compliant	
A1	2/6/2012	Updated connector description	Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent	
A2	7/30/2012	Include wire part number	Tolerances:	Description:	
A3	8/29/2016	Modified overmold & connector overall length	X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 2000 mm, 5.5x2.5x7.5mm 90° 50-00011 locking dc plug to same, 18 AWG, UL1185, 30-00004 wire	
					Size: A Part number: 10-00121 Scale: 1:1 Sheet 1 of 1