



Pushing Performance  
Since 1945

# DIN-Signal 2C/2R shroud screwfix 7.50

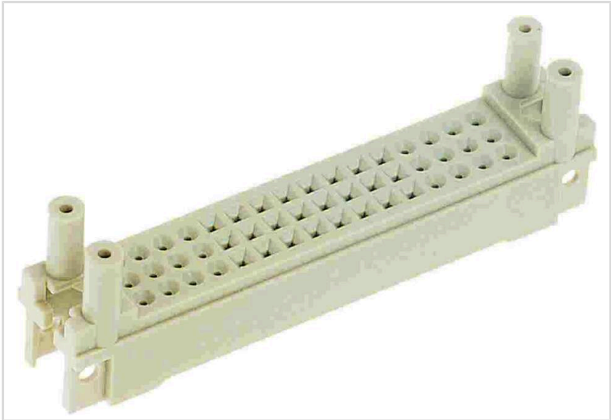


Image is for illustration purposes only. Please refer to product description.

|                    |                                                                               |
|--------------------|-------------------------------------------------------------------------------|
| Part number        | 09 23 000 9965                                                                |
| Specification      | DIN-Signal 2C/2R shroud screwfix 7.50                                         |
| HARTING eCatalogue | <a href="https://harting.com/09230009965">https://harting.com/09230009965</a> |

## Identification

|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| Category                     | Accessories                                                  |
| Series                       | DIN 41612                                                    |
| Type of accessory            | Pin shroud                                                   |
| Description of the accessory | for female connectors type 2C<br>for male connectors type 2R |

## Version

|                    |              |
|--------------------|--------------|
| Termination length | 16.2 mm      |
|                    | 17 mm        |
|                    | 20 mm        |
| Fixing             | Screw fixing |

## Technical characteristics

|                 |                               |
|-----------------|-------------------------------|
| Isolation group | IIIa ( $175 \leq CTI < 400$ ) |
| PCB thickness   | 4.2 mm $\pm 0.5$              |
|                 | 5 mm $\pm 0.5$                |
|                 | 8 mm $\pm 0.5$                |

## Material properties

|                                           |                        |
|-------------------------------------------|------------------------|
| Material (accessories)                    | Thermoplastic          |
| Colour (accessories)                      | RAL 7032 (pebble grey) |
| Material flammability class acc. to UL 94 | V-0                    |
| RoHS                                      | compliant              |
| ELV status                                | compliant              |
| China RoHS                                | e                      |



**Pushing Performance**  
Since 1945

## Material properties

|                                      |               |
|--------------------------------------|---------------|
| REACH Annex XVII substances          | Not contained |
| REACH ANNEX XIV substances           | Not contained |
| REACH SVHC substances                | Not contained |
| California Proposition 65 substances | Yes           |

## Specifications and approvals

|                        |                              |
|------------------------|------------------------------|
| Railway classification | F1/I2 acc. to NFF 16-101/102 |
|------------------------|------------------------------|

## Commercial data

|                                |                                            |
|--------------------------------|--------------------------------------------|
| Packaging size                 | 1                                          |
| Net weight                     | 3.62 g                                     |
| Country of origin              | Vietnam                                    |
| European customs tariff number | 85389099                                   |
| GTIN                           | 5713140041356                              |
| eCl@ss                         | 27440292 Connector component (accessories) |
| ETIM                           | EC002943                                   |
| UNSPSC 24.0                    | 39121400                                   |