

TLE9018DQK

Li-ion battery monitoring and balancing IC

The TLE9018DQK is a multi-channel battery monitoring and balancing IC designed for Li-Ion battery packs used in many applications in the automotive (electric vehicles of any kind MHEV, HEV, PHEV and BEV, etc.), industrial (Energy storage systems) and consumer world (e.g. e-bike BMS, home energy storage, etc.).

TLE9018DQK fulfills four main functions: cell voltage measurement, temperature measurement, cell balancing and isolated communication to main battery controller. Additionally, TLE9018DQK provides diagnostic tools to ensure proper function guaranteeing the safety of the people around the controlled battery.

Summary of Features


- Balancing & monitoring for up to **18 cells in series**
 - Simultaneous balancing up to 300mA/per cell (cont. or PWM)
 - Low power balancing mode
- Robust **Infineon 120V automotive technology** supports hot plug without external protection
- Dedicated 16-bit DS ADC per cell enables parallel & filtered measurements
 - **Configurable digital filter** (down to 70Hz cut-off)
 - IIR filtering <10Hz cut-off option
- Secondary ADC with same filter characteristics for a synced cell voltage plausibility as advanced End-to-End safety mechanism
- Iso UART communication interface
 - Differential robust serial 3 Mbit/s
 - Robust capacitive coupled interface for daisy chain & ring mode communication
 - Emergency mode for communication
 - Low EMI and power balanced communication scheme
- 8 error-compensated NTC channels
- **SPI master interface** e.g. for external sensors or EEPROM
- Sleep current down to 4µA
- **Several wake sources** via bus or static signal
- **Internal round robin cycle routine** to trigger **safety mechanisms** such as
 - Automatic balancing overcurrent and undercurrent detection scheme
 - Automatic open load detection scheme
 - Automatic NTC measurement unit monitoring scheme
- Compatible with Infineon **Complex Device Driver** for AURIX™ TC36x/37x/38x
- Compatible with **PSoC HVPA PPM/CPM Pack Monitor IC**
- Supporting up to **ASIL D BMS** safety applications
- High feature integration for **leanest BOM**

Key benefits

- **Best in class Application Robustness:** Infineon technology and device architecture guarantee best performances under noise
- **High accuracy voltage measurement:** Reliable and precise battery cell monitoring for highly accurate SoC and SoH
- **Lowest system cost:** High feature integration for a lean external BOM



Block Diagram

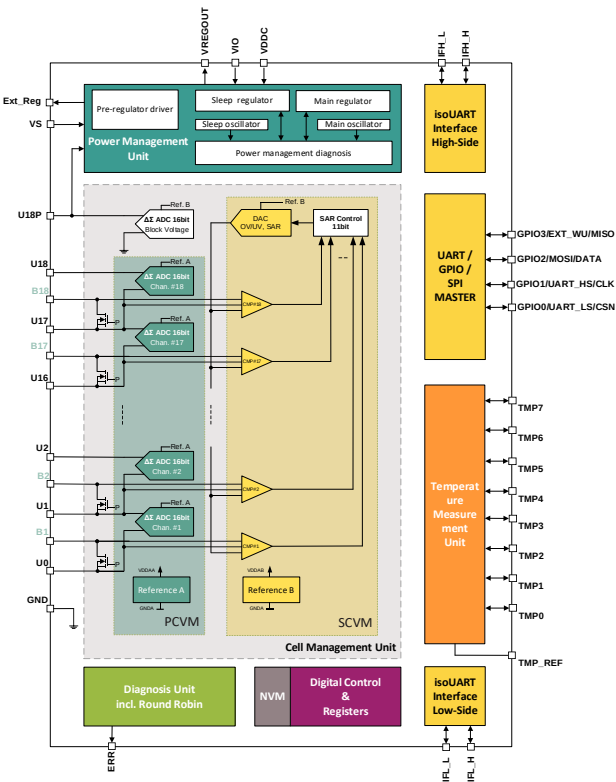

Product Table

Product	Balancing Current Max (mA)	Lowest voltage (V)	abs. max (V)	Standby Current (µA)	Tj max (°C)	Temp. Measurement Channels	Comm. Speed (Mbit)	Voltage Measurement Channels	Functional Safety	Package
TLE9018DQK Monitoring & Balancing IC	300	6	120	4	150	8	3	18	ASIL D	LQFP-64
TLE9012DQU Monitoring & Balancing IC	200	4,75	90	4	150	5	2	12	ASIL D	TQFP-48
TLE9015DQU Transceiver	-	4,75	90	3	150	-	2	-	-	TQFP-48

Published by
Infineon Technologies AG
Am Campeon 1-15, 85579 Neubiberg
Germany

© 2025 Infineon Technologies AG
All rights reserved.

Public

Document number:
Date: 04/2025

Please note!
This Document is for information purposes only and any information given herein shall in no event be regarded as a warranty, guarantee or description of any functionality, conditions and/or quality of our products or any suitability for a particular purpose. With regard to the technical specifications of our products, we kindly ask you to refer to the relevant product data sheets provided by us. Our customers and their technical departments are required to evaluate the suitability of our products for the intended application.

We reserve the right to change this document and/or the information given herein at any time.

Additional information
For further information on technologies, our products, the application of our products, delivery terms and conditions and/or prices, please contact your nearest Infineon Technologies office (www.infineon.com).

Warnings
Due to technical requirements, our products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by us in a written document signed by authorized representatives of Infineon Technologies, our products may not be used in any life-endangering applications, including but not limited to medical, nuclear, military, life-critical or any other applications where a failure of the product or any consequences of the use thereof can result in personal injury.



Scan QR code and explore offering
www.infineon.com