

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	57-00010	LED, Ø5x8.3 mm, white, InGaP, 3.0 V, 50°, 20000 mcd	1	
2	30-01772	Wire, hook-up, TS, 26 AWG, UL 11028, 600V, 105C, 1 mm, mPPE, red	1	
3	30-01773	Wire, hook-up, TS, 26 AWG, UL 11028, 600V, 105C, 1 mm, mPPE, black	1	
4	56-00043	O-ring, Ø9 ID x Ø12 OD x 1.5mm, silicone rubber, black	1	
5	56-00041	Hardware, hex nut, 13x2.5 mm, M10x1.0, nickel plated	1	
6	56-00042	Hardware, washer, lock, 12x10.5x1 mm, SUS, nickel plated	1	
7	24-00448	Overmold, LED, 13x15 mm, IP68	1	Nylon, black

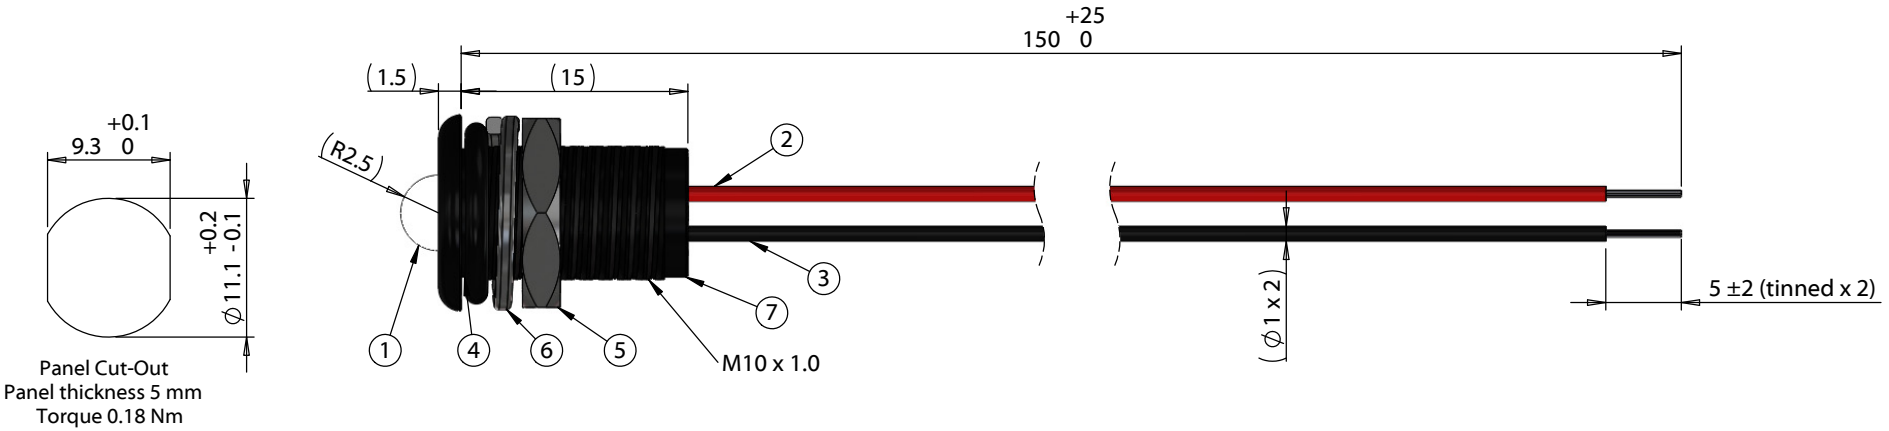

LED Properties @ 25 °C, 20 mA (IF)			
	Min.	Typ.	Max.
Forward voltage (VF)	2.8 V	3.0 V	3.4 V
Reverse current (IR)	-	-	5 µA
Luminous intensity (IV)	8000 mcd	20,000 mcd	25,000 mcd
Viewing angle (2θ1/2)	-	50°	-
Forward current (IF)	-	-	20 mA
Peak forward current (IFP)	-	-	100 mA
Peak wavelength (λP)	1600 nm	-	1800 nm
Operating temp	-40~80 °C		



Wiring Diagram	
57-00010	wire color
+	red
-	black

Revision:	Date:	Description:
A	04/09/2025	Initial release

Prepared: CR Digitally signed by CR Date: 2026.03.29 23:40:19 -07'00'

Verified: KW Digitally signed by KW Date: 2026.03.30 11:44:32 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:
Packaged bulk in static-shielded bag

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:
Cable, 150 mm, white LED 57-00010 to 5 mm tinned, panel mount, 26 AWG, UL11028, IP68

TENSILITY
tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A | Part number: 12-00047

Scale: 2:1 | Sheet 1 of 1

5 4 3 2 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com