# AB/SS-M - Support bracket

3025888

https://www.phoenixcontact.com/us/products/3025888

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Support bracket, with contact to the mounting panel, with retaining screw, can be used for busbar 3 x 10 mm, color: gray

## Commercial data

| | |
|---|---|
| Item number | 3025888 |
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| Sales key | BE07 |
| Product key | BE7113 |
| GTIN | 4017918147549 |
| Weight per piece (including packing) | 9.61 g |
| Weight per piece (excluding packing) | 9.49 g |
| Customs tariff number | 39269097 |
| Country of origin | PL |

## Technical data


### Product properties

| | |
|---|---|
| Product type | Support bracket |
| Number of positions | 1.00 |

### Electrical properties

| | |
|---|---|
| Nominal current $I_N$ | 0 A |

### Dimensions

| | |
|---|---|
| Dimensional drawing |  |
| Width | 19.4 mm |
| Height | 23.4 mm |
| Depth | 21.7 mm |
| Length | 23.4 mm |
| Diameter | 4.7 mm |

### Material specifications

| | |
|---|---|
| Color | gray (RAL 7042) |
| Material | PA |
| Flammability rating according to UL 94 | V2 |
| Static insulating material application in cold | -40 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 125 °C |
| Components | free from silicone and halogen |

### Environmental and real-life conditions

#### Ambient conditions


| | |
|---|---|
| Ambient temperature (operation) | -40 °C ... 110 °C |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

### Mounting

| | |
|---|---|
| Mounting type | Direct mounting |

## Drawings

Dimensional drawing

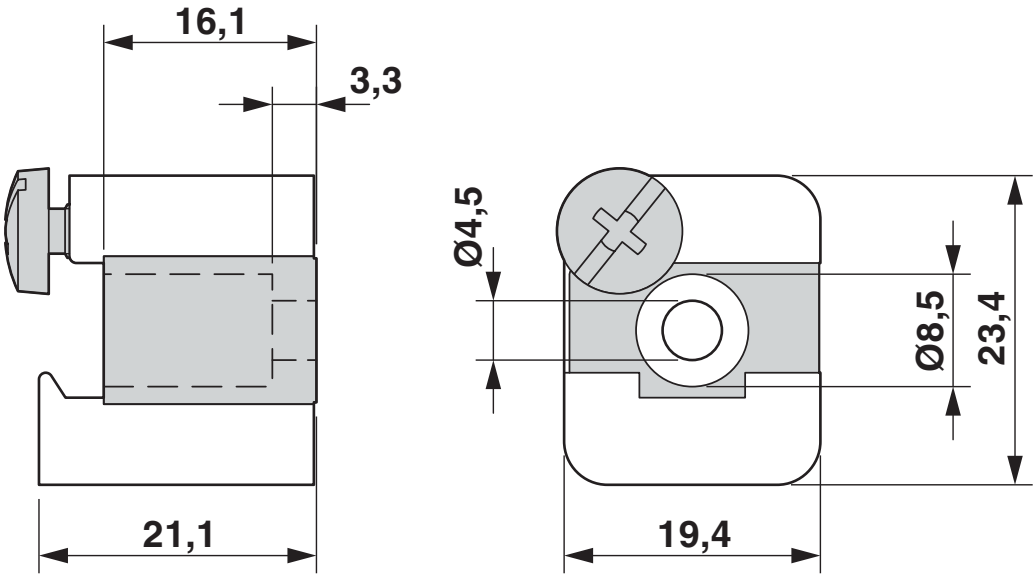

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-13.0 | 27400607 |
| ECLASS-15.0 | 27400607 |

### ETIM

| | |
|---|---|
| ETIM 9.0 | EC001166 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 39121700 |

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

EF3.0 Climate Change

| | |
|---|---|
| CO2e kg | 0.06 kg CO2e |


Phoenix Contact 2025 © - all rights reserved
https://www.phoenixcontact.com



Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com