

# USB-Compliant Single-Cell Li-Ion Switching Charger with USB-OTG Boost Regulator

## FAN54015

### Description

The FAN54015 combines a highly integrated switch-mode charger, to minimize single-cell Lithium-ion (Li-ion) charging time from a USB power source, and a boost regulator to power a USB peripheral from the battery.

The charging parameters and operating modes are programmable through an I<sup>2</sup>C Interface that operates up to 3.4 Mbps. The charger and boost regulator circuits switch at 3 MHz to minimize the size of external passive components.

The FAN54015 provides battery charging in three phases: conditioning, constant current and constant voltage.

To ensure USB compliance and minimize charging time, the input current limit can be changed through the I<sup>2</sup>C by the host processor. Charge termination is determined by a programmable minimum current level. A safety timer with reset control provides a safety backup for the I<sup>2</sup>C host. Charge status is reported to the host through the I<sup>2</sup>C port.

The integrated circuit (IC) automatically restarts the charge cycle when the battery falls below an internal threshold. If the input source is removed, the IC enters a high-impedance mode, preventing leakage from the battery to the input. Charge current is reduced when the die temperature reaches 120°C, protecting the device and PCB from damage.

The FAN54015 can operate as a boost regulator on command from the system. The boost regulator includes a soft-start that limits inrush current from the battery and uses the same external components used for charging the battery.

### Features

- Fully Integrated, High-Efficiency Charger for Single-Cell Li-Ion and Li-Polymer Battery Packs
- Faster Charging than Linear
- Charge Voltage Accuracy: +0.5% at 25°C  
+1% from 0 to 125°C
- +5% Input Current Regulation Accuracy
- +5% Charge Current Regulation Accuracy
- 20 V Absolute Maximum Input Voltage
- 6 V Maximum Input Operating Voltage
- 1.45 A Maximum Charge Rate
- Programmable through High-Speed I<sup>2</sup>C Interface (3.4 Mb/s) with Fast Mode Plus Compatibility
  - ◆ Input Current
  - ◆ Fast-Charge / Termination Current
  - ◆ Charger Voltage
  - ◆ Termination Enable




ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)



WLCSP20 1.96x1.87x0.586  
CASE 567SL

### MARKING DIAGRAM



A9 = Specific Device Code  
&K = 2-Digits Lot Run Traceability Code  
&. = Pin One Dot  
&2 = 2-Digit Date Code Format  
&Z = Assembly Plant Code

### ORDERING INFORMATION

See detailed ordering and shipping information on page 31 of this data sheet.

### Features (continued)

- 3 MHz Synchronous Buck PWM Controller with Wide Duty Cycle Range
- Small Footprint 1 mH External Inductor
- Safety Timer with Reset Control
- 1.8 V Regulated Output from VBUS for Auxiliary Circuits
- Dynamic Input Voltage Control
- Low Reverse Leakage to Prevent Battery Drain to VBUS
- 5 V, 500 mA Boost Mode for USB OTG for 3.0 V to 4.5 V Battery Input
- Available in a 1.96 x 1.87 mm, 20-bump, 0.4 mm Pitch WLCSP Package
- These are Pb-Free Devices

### Applications

- Cell Phones, Smart Phones, PDAs
- Tablet, Portable Media Players
- Gaming Device, Digital Cameras

# FAN54015

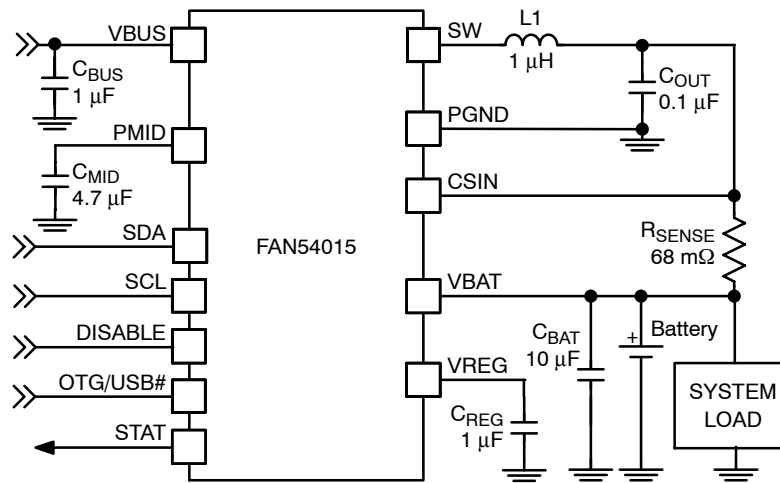


Figure 1. Typical Application

Table 1. FEATURE SUMMARY

| Part Number | Slave Address | Automatic Charge | Special Charger (Note 1) | Safety Limits | Battery Absent Behavior | E2 Pin  | VREG (E3 Pin) |
|-------------|---------------|------------------|--------------------------|---------------|-------------------------|---------|---------------|
| FAN54015UCX | 1101010       | Yes              | Yes                      | Yes           | ON                      | DISABLE | 1.8 V         |

1. A "special charger" is a current-limited charger that is not a USB compliant source.

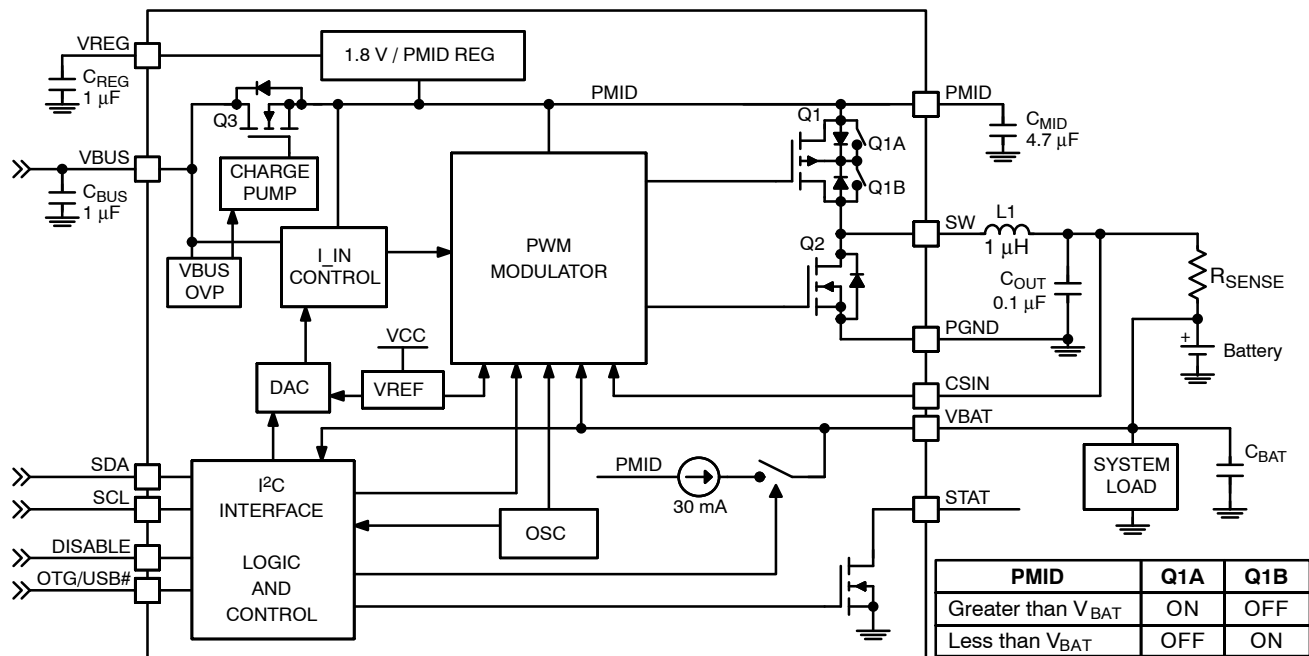


Figure 2. IC and System Block Diagram

Table 2. RECOMMENDED EXTERNAL COMPONENTS

| Component | Description                                            | Vendor                                        | Parameter  | Typ | Unit |
|-----------|--------------------------------------------------------|-----------------------------------------------|------------|-----|------|
| L1        | 1 $\mu$ H $\pm$ 20%, 1.6 A, DCR = 55 m $\Omega$ , 2520 | Murata: LQM2HPN1R0                            | L          | 1.0 | mH   |
|           | 1 $\mu$ H $\pm$ 30%, 1.4 A, DCR = 85 m $\Omega$ , 2016 | Murata: LQM2MPN1R0                            |            |     |      |
| CBAT      | 10 $\mu$ F, 20%, 6.3 V, X5R, 0603                      | Murata: GRM188R60J106M<br>TDK: C1608X5R0J106M | C          | 10  | mF   |
| CMID      | 4.7 $\mu$ F, 10%, 6.3 V, X5R, 0603                     | Murata: GRM188R60J475K<br>TDK: C1608X5R0J475K | C (Note 2) | 4.7 | mF   |
| CBUS      | 1.0 $\mu$ F, 10%, 25 V, X5R, 0603                      | Murata GRM188R61E105K<br>TDK:C1608X5R1E105M   | C          | 1.0 | mF   |

2. A 6.3 V rating is sufficient for C<sub>MID</sub> because PMID is protected from over-voltage surges on VBUS by Q3 (Figure 2).



Figure 3. WLCSP-20 Pin Assignments

## PIN DEFINITIONS

| Pin #   | Name    | Description                                                                                                                                                                                                                               |
|---------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A1, A2  | VBUS    | <i>Charger Input Voltage</i> and USB-OTG output voltage. Bypass with a 1 $\mu$ F capacitor to PGND.                                                                                                                                       |
| A3      | NC      | <i>No Connect</i> . No external connection is made between this pin and the IC's internal circuitry.                                                                                                                                      |
| A4      | SCL     | <i>I<sup>2</sup>C Interface Serial Clock</i> . This pin should not be left floating.                                                                                                                                                      |
| B1–B3   | PMID    | <i>Power Input Voltage</i> . Power input to the charger regulator, bypass point for the input current sense, and high-voltage input switch. Bypass with a minimum of 4.7 $\mu$ F, 6.3 V capacitor to PGND.                                |
| B4      | SDA     | <i>I<sup>2</sup>C Interface Serial Data</i> . This pin should not be left floating.                                                                                                                                                       |
| C1 – C3 | SW      | <i>Switching Node</i> . Connect to output inductor.                                                                                                                                                                                       |
| C4      | STAT    | <i>Status</i> . Open-drain output indicating charge status. The IC pulls this pin LOW when charging.                                                                                                                                      |
| D1 – D3 | PGND    | <i>Power Ground</i> . Power return for gate drive and power transistors. The connection from this pin to the bottom of C <sub>MID</sub> should be as short as possible.                                                                   |
| D4      | OTG     | <i>On-The-Go</i> . Enables boost regulator in conjunction with OTG_EN and OTG_PL bits (see Table 16). On VBUS Power-On Reset (POR), this pin sets the input current limit for t <sub>15MIN</sub> charging.                                |
| E1      | CSIN    | <i>Current-Sense Input</i> . Connect to the sense resistor in series with the battery. The IC uses this node to sense current into the battery. Bypass this pin with a 0.1 $\mu$ F capacitor to PGND.                                     |
| E2      | DISABLE | <i>Charge Disable</i> . If this pin is HIGH, charging is disabled. When LOW, charging is controlled by the I <sup>2</sup> C registers. When this pin is HIGH, the 15-minute timer is reset. This pin does not affect the 32-second timer. |
| E3      | VREG    | <i>Regulator Output</i> . Connect to a 1 $\mu$ F capacitor to PGND. This pin can supply up to 2mA of DC load current. The output voltage is PMID, which is limited to 1.8 V.                                                              |
| E4      | VBAT    | <i>Battery Voltage</i> . Connect to the positive (+) terminal of the battery pack. Bypass with a 0.1 $\mu$ F capacitor to PGND if the battery is connected through long leads.                                                            |

## ABSOLUTE MAXIMUM RATINGS

| Symbol                | Parameter                                                                   |                                       | Min  | Max          | Unit |
|-----------------------|-----------------------------------------------------------------------------|---------------------------------------|------|--------------|------|
| V <sub>BUS</sub>      | VBUS Voltage                                                                | Continuous                            | −1.4 | 20.0         | V    |
|                       |                                                                             | Pulsed, 100 ms Maximum Non–Repetitive | −2.0 |              |      |
| V <sub>STAT</sub>     | STAT Voltage                                                                |                                       | −0.3 | 16.0         | V    |
| V <sub>I</sub>        | PMID Voltage                                                                |                                       | –    | 7.0          | V    |
|                       | SW, CSIN, VBAT, DISABLE Voltage                                             |                                       | −0.3 | 7.0          |      |
| V <sub>O</sub>        | Voltage on Other Pins                                                       |                                       | −0.3 | 6.5 (Note 3) | V    |
| $\frac{dV_{BUS}}{dt}$ | Maximum V <sub>BUS</sub> Slope above 5.5 V when Boost or Charger are Active |                                       | –    | 4            | V/μs |
| ESD                   | Electrostatic Discharge Protection Level                                    | Human Body Model per JESD22–A114      | 2000 |              | V    |
|                       |                                                                             | Charged Device Model per JESD22–C101  | 500  |              |      |
| T <sub>J</sub>        | Junction Temperature                                                        |                                       | −40  | +150         | °C   |
| T <sub>STG</sub>      | Storage Temperature                                                         |                                       | −65  | +150         | °C   |
| T <sub>L</sub>        | Lead Soldering Temperature, 10 Seconds                                      |                                       | –    | +260         | °C   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

3. Lesser of 6.5 V or V<sub>I</sub> + 0.3 V.

## RECOMMENDED OPERATING CONDITIONS

| Symbol                 | Parameter                                                                                                                     |                       | Min | Max  | Unit |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----|------|------|
| V <sub>BUS</sub>       | Supply Voltage                                                                                                                |                       | 4   | 6    | V    |
| V <sub>BAT(MAX)</sub>  | Maximum Battery Voltage when Boost enabled                                                                                    |                       | −   | 4.5  | V    |
| $-\frac{dV_{BUS}}{dt}$ | Negative VBUS Slew Rate during VBUS Short Circuit, C <sub>MID</sub> ≤ 4.7 μF (see <a href="#">VBUS Short While Charging</a> ) | T <sub>A</sub> ≤ 60°C | −   | 4    | V/μs |
|                        |                                                                                                                               | T <sub>A</sub> ≥ 60°C | −   | 2    |      |
| T <sub>A</sub>         | Ambient Temperature                                                                                                           |                       | −30 | +85  | °C   |
| T <sub>J</sub>         | Junction Temperature (see <a href="#">Thermal Regulation and Protection</a> section)                                          |                       | −30 | +120 | °C   |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

## THERMAL PROPERTIES

| Symbol          | Parameter                              | Value | Unit |
|-----------------|----------------------------------------|-------|------|
| θ <sub>JA</sub> | Junction-to-Ambient Thermal Resistance | 60    | °C/W |
| θ <sub>JB</sub> | Junction-to-PCB Thermal Resistance     | 20    | °C/W |

Junction-to-ambient thermal resistance is a function of application and board layout. This data is measured with four-layer 2s2p boards in accordance to JEDEC standard JESD51. Special attention must be paid not to exceed junction temperature T<sub>J(max)</sub> at a given ambient temperature T<sub>A</sub>. For measured data, see Table 11.

# FAN54015

**ELECTRICAL SPECIFICATIONS** (Unless otherwise specified: according to the circuit of Figure 1; recommended operating temperature range for  $T_J$  and  $T_A$ ;  $V_{BUS} = 5.0\text{ V}$ ;  $HZ\_MODE$ ;  $OPA\_MODE = 0$ ; (Charge Mode);  $SCL$ ,  $SDA$ ,  $OTG = 0$  or  $1.8\text{ V}$ ; and typical values are for  $T_J = 25^\circ\text{C}$ )

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------|-----------|------------|-----|-----|-----|------|
|--------|-----------|------------|-----|-----|-----|------|

## POWER SUPPLIES

|            |                                                  |                                                                                                                 |   |     |     |               |
|------------|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|---|-----|-----|---------------|
| $I_{VBUS}$ | VBUS Current                                     | $V_{BUS} > V_{BUS(min)}$ , PWM Switching                                                                        | – | 10  | –   | mA            |
|            |                                                  | $V_{BUS} > V_{BUS(min)}$ ; PWM Enabled, Not Switching (Battery OVP Condition); $I_{IN}$ Setting = 100 mA        | – | 2.5 | –   | mA            |
|            |                                                  | $0^\circ\text{C} < T_J < 85^\circ\text{C}$ , $HZ\_MODE = 1$ , $V_{BAT} < V_{LOWV}$ , 32S Mode                   | – | 63  | 90  | $\mu\text{A}$ |
| $I_{LKG}$  | VBAT to VBUS Leakage Current                     | $0^\circ\text{C} < T_J < 85^\circ\text{C}$ , $HZ\_MODE = 1$ , $V_{BAT} = 4.2\text{ V}$ , $V_{BUS} = 0\text{ V}$ | – | 0.2 | 5.0 | $\mu\text{A}$ |
| $I_{BAT}$  | Battery Discharge Current in High-Impedance Mode | $0^\circ\text{C} < T_J < 85^\circ\text{C}$ , $HZ\_MODE = 1$ , $V_{BAT} = 4.2\text{ V}$                          | – | –   | 20  | $\mu\text{A}$ |
|            |                                                  | DISABLE = 1, $0^\circ\text{C} < T_J < 85^\circ\text{C}$ , $V_{BAT} = 4.2\text{ V}$                              | – | –   | 10  | $\mu\text{A}$ |

## CHARGER VOLTAGE REGULATION

|            |                         |                                  |       |   |       |   |
|------------|-------------------------|----------------------------------|-------|---|-------|---|
| $V_{OREG}$ | Charge Voltage Range    |                                  | 3.5   | – | 4.4   | V |
|            | Charge Voltage Accuracy | $T_A = 25^\circ\text{C}$         | –0.5% | – | +0.5% |   |
|            |                         | $T_J = 0$ to $125^\circ\text{C}$ | –1%   | – | +1%   |   |

## CHARGING CURRENT REGULATION

|             |                                            |                                                                   |     |    |      |    |
|-------------|--------------------------------------------|-------------------------------------------------------------------|-----|----|------|----|
| $I_{OCHRG}$ | Output Charge Current Range                | $V_{LOWV} < V_{BAT} < V_{OREG}$ , $R_{SENSE} = 68\text{ m}\Omega$ | 550 | –  | 1450 | mA |
|             | Charge Current Accuracy Across $R_{SENSE}$ | $20\text{ mV} \leq V_{IREG} \leq 40\text{ mV}$                    | 92  | 97 | 102  | %  |
|             |                                            | $V_{IREG} > 40\text{ mV}$                                         | 94  | 97 | 100  | %  |

## WEAK BATTERY DETECTION

|            |                                 |                |     |    |     |    |
|------------|---------------------------------|----------------|-----|----|-----|----|
| $V_{LOWV}$ | Weak Battery Threshold Range    |                | 3.4 | –  | 3.7 | V  |
|            | Weak Battery Threshold Accuracy |                | –5  | –  | +5  | %  |
|            | Weak Battery Deglitch Time      | Rising Voltage | –   | 30 | –   | ms |

## LOGIC LEVELS: DISABLE, SDA, SCL, OTG

|          |                          |                               |      |      |      |               |
|----------|--------------------------|-------------------------------|------|------|------|---------------|
| $V_{IH}$ | High-Level Input Voltage |                               | 1.05 | –    | –    | V             |
| $V_{IL}$ | Low-Level Input Voltage  |                               | –    | –    | 0.4  | V             |
| $I_{IN}$ | Input Bias Current       | Input Tied to GND or $V_{IN}$ | –    | 0.01 | 1.00 | $\mu\text{A}$ |

## CHARGE TERMINATION DETECTION

|              |                                   |                                                                  |     |    |     |    |
|--------------|-----------------------------------|------------------------------------------------------------------|-----|----|-----|----|
| $I_{(TERM)}$ | Termination Current Range         | $V_{BAT} > V_{OREG} - V_{RCH}$ , $R_{SENSE} = 68\text{ m}\Omega$ | 50  | –  | 400 | mA |
|              | Termination Current Accuracy      | $[V_{CSIN} - V_{BAT}]$ from 3 mV to 20 mV                        | –25 | –  | +25 | %  |
|              |                                   | $[V_{CSIN} - V_{BAT}]$ from 20 mV to 40 mV                       | –5  | –  | +5  |    |
|              | Termination Current Deglitch Time | 2 mV Overdrive                                                   | –   | 30 | –   | ms |

## 1.8 V LINEAR REGULATOR

|           |                        |                          |     |     |     |   |
|-----------|------------------------|--------------------------|-----|-----|-----|---|
| $V_{REG}$ | 1.8 V Regulator Output | $I_{REG}$ from 0 to 2 mA | 1.7 | 1.8 | 1.9 | V |
|-----------|------------------------|--------------------------|-----|-----|-----|---|

## INPUT POWER SOURCE DETECTION

|                   |                            |                                      |   |      |      |    |
|-------------------|----------------------------|--------------------------------------|---|------|------|----|
| $V_{IN(MIN)1}$    | VBUS Input Voltage Rising  | To Initiate and Pass VBUS Validation | – | 4.29 | 4.42 | V  |
| $V_{IN(MIN)2}$    | Minimum VBUS During Charge | During Charging                      | – | 3.71 | 3.94 | V  |
| $t_{VBUS\_VALID}$ | VBUS Validation Time       |                                      | – | 30   | –    | ms |

## SPECIAL CHARGER ( $V_{BUS}$ )

|          |                                   |  |    |   |    |   |
|----------|-----------------------------------|--|----|---|----|---|
| $V_{SP}$ | Special Charger Setpoint Accuracy |  | –3 | – | +3 | % |
|----------|-----------------------------------|--|----|---|----|---|

# FAN54015

**ELECTRICAL SPECIFICATIONS** (Unless otherwise specified: according to the circuit of Figure 1; recommended operating temperature range for  $T_J$  and  $T_A$ ;  $V_{BUS} = 5.0\text{ V}$ ;  $HZ\_MODE$ ;  $OPA\_MODE = 0$ ; (Charge Mode); SCL, SDA, OTG = 0 or 1.8 V; and typical values are for  $T_J = 25^\circ\text{C}$ ) (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------|-----------|------------|-----|-----|-----|------|
|--------|-----------|------------|-----|-----|-----|------|

## INPUT CURRENT LIMIT

|             |                               |                        |     |     |     |    |
|-------------|-------------------------------|------------------------|-----|-----|-----|----|
| $I_{INLIM}$ | Input Current Limit Threshold | $I_{IN}$ Set to 100 mA | 88  | 93  | 98  | mA |
|             |                               | $I_{IN}$ Set to 500 mA | 450 | 475 | 500 |    |

## V<sub>REF</sub> BIAS GENERATOR

|           |                             |                                                     |   |    |     |    |
|-----------|-----------------------------|-----------------------------------------------------|---|----|-----|----|
| $V_{REF}$ | Bias Regulator Voltage      | $V_{BUS} > V_{IN(MIN)}$ or $V_{BAT} > V_{BAT(MIN)}$ | – | –  | 6.5 | V  |
|           | Short-Circuit Current Limit |                                                     | – | 20 | –   | mA |

## BATTERY RECHARGE THRESHOLD

|           |                    |                                             |     |     |     |    |
|-----------|--------------------|---------------------------------------------|-----|-----|-----|----|
| $V_{RCH}$ | Recharge Threshold | Below $V_{(OREG)}$                          | 100 | 120 | 150 | mV |
|           | Deglintch Time     | $V_{BAT}$ Falling Below $V_{RCH}$ Threshold | –   | 130 | –   | ms |

## STAT OUTPUT

|                |                           |                           |   |   |     |               |
|----------------|---------------------------|---------------------------|---|---|-----|---------------|
| $V_{STAT(OL)}$ | STAT Output Low           | $I_{STAT} = 10\text{ mA}$ | – | – | 0.4 | V             |
| $I_{STAT(OH)}$ | STAT High Leakage Current | $V_{STAT} = 5\text{ V}$   | – | – | 1   | $\mu\text{A}$ |

## BATTERY DETECTION

|              |                                                                      |                                                                         |   |       |   |    |
|--------------|----------------------------------------------------------------------|-------------------------------------------------------------------------|---|-------|---|----|
| $I_{DETECT}$ | Battery Detection Current before Charge Done (Sink Current) (Note 4) | Begins after Termination Detected and $V_{BAT} \leq V_{OREG} - V_{RCH}$ | – | –0.80 | – | mA |
| $t_{DETECT}$ | Battery Detection Time                                               |                                                                         |   | 262   |   | ms |

## SLEEP COMPARATOR

|                 |                                                                  |                                                               |   |      |      |    |
|-----------------|------------------------------------------------------------------|---------------------------------------------------------------|---|------|------|----|
| $V_{SLP}$       | Sleep-Mode Entry Threshold, $V_{BUS} - V_{BAT}$                  | $2.3\text{ V} \leq V_{BAT} \leq V_{OREG}$ , $V_{BUS}$ Falling | 0 | 0.04 | 0.10 | V  |
| $t_{SLP\_EXIT}$ | Deglintch Time for $V_{BUS}$ Rising Above $V_{BAT}$ by $V_{SLP}$ | Rising Voltage                                                | – | 30   | –    | ms |

## POWER SWITCHES (see Figure 2)

|              |                                       |                                 |   |     |     |            |
|--------------|---------------------------------------|---------------------------------|---|-----|-----|------------|
| $R_{DS(ON)}$ | Q3 On Resistance ( $V_{BUS}$ to PMID) | $I_{IN(LIMIT)} = 500\text{ mA}$ | – | 180 | 250 | m $\Omega$ |
|              | Q1 On Resistance (PMID to SW)         |                                 | – | 130 | 225 |            |
|              | Q2 On Resistance (SW to GND)          |                                 | – | 150 | 225 |            |

## CHARGER PWM MODULATOR

|            |                                                                   |                                                   |     |     |     |     |
|------------|-------------------------------------------------------------------|---------------------------------------------------|-----|-----|-----|-----|
| $f_{SW}$   | Oscillator Frequency                                              |                                                   | 2.7 | 3.0 | 3.3 | MHz |
| $D_{MAX}$  | Maximum Duty Cycle                                                |                                                   | –   | –   | 100 | %   |
| $D_{MIN}$  | Minimum Duty Cycle                                                |                                                   | –   | 0   | –   | %   |
| $I_{SYNC}$ | Synchronous to Non-Synchronous Current Cut-Off Threshold (Note 5) | Low-Side MOSFET (Q2) Cycle-by-Cycle Current Limit | –   | 140 | –   | mA  |

## BOOST MODE OPERATION ( $OPA\_MODE = 1$ , $HZ\_MODE = 0$ )

|                  |                                             |                                                                       |      |      |      |               |
|------------------|---------------------------------------------|-----------------------------------------------------------------------|------|------|------|---------------|
| $V_{BOOST}$      | Boost Output Voltage at $V_{BUS}$           | $2.5\text{ V} < V_{BAT} < 4.5\text{ V}$ , $I_{LOAD}$ from 0 to 200 mA | 4.80 | 5.07 | 5.17 | V             |
|                  |                                             | $3.0\text{ V} < V_{BAT} < 4.5\text{ V}$ , $I_{LOAD}$ from 0 to 500 mA | 4.77 | 5.07 | 5.17 |               |
| $I_{BAT(BOOST)}$ | Boost Mode Quiescent Current                | PFM Mode, $V_{BAT} = 3.6\text{ V}$ , $I_{OUT} = 0$                    | –    | 140  | 300  | $\mu\text{A}$ |
| $I_{LIMPK(BST)}$ | Q2 Peak Current Limit                       |                                                                       | 1272 | 1590 | 1908 | mA            |
| $UVLO_{BST}$     | Minimum Battery Voltage for Boost Operation | While Boost Active                                                    | –    | 2.42 | –    | V             |
|                  |                                             | To Start Boost Regulator                                              | –    | 2.58 | 2.70 |               |

## VBUS LOAD RESISTANCE

|            |                              |                    |   |      |   |            |
|------------|------------------------------|--------------------|---|------|---|------------|
| $R_{VBUS}$ | $V_{BUS}$ to PGND Resistance | Normal Operation   | – | 1500 | – | k $\Omega$ |
|            |                              | Charger Validation | – | 100  | – | $\Omega$   |

# FAN54015

**ELECTRICAL SPECIFICATIONS** (Unless otherwise specified: according to the circuit of Figure 1; recommended operating temperature range for  $T_J$  and  $T_A$ ;  $V_{BUS} = 5.0\text{ V}$ ;  $HZ\_MODE$ ;  $OPA\_MODE = 0$ ; (Charge Mode); SCL, SDA, OTG = 0 or 1.8 V; and typical values are for  $T_J = 25^\circ\text{C}$ ) (continued)

| Symbol                       | Parameter                             | Conditions                      | Min  | Typ  | Max  | Unit             |
|------------------------------|---------------------------------------|---------------------------------|------|------|------|------------------|
| <b>PROTECTION AND TIMERS</b> |                                       |                                 |      |      |      |                  |
| $V_{BUS\_OVP}$               | VBUS Over-Voltage Shutdown            | $V_{BUS}$ Rising                | 6.09 | 6.29 | 6.49 | V                |
|                              | Hysteresis                            | $V_{BUS}$ Falling               | –    | 100  | –    | mV               |
| $I_{LIMPK(CHG)}$             | Q1 Cycle-by-Cycle Peak Current Limit  | Charge Mode                     | –    | 2.3  | –    | A                |
| $V_{SHORT}$                  | Battery Short-Circuit Threshold       | $V_{BAT}$ Rising                | 1.95 | 2.00 | 2.05 | V                |
|                              | Hysteresis                            | $V_{BAT}$ Falling               | –    | 100  | –    | mV               |
| $I_{SHORT}$                  | Linear Charging Current               | $V_{BAT} < V_{SHORT}$           | 20   | 30   | 40   | mA               |
| $T_{SHUTDWN}$                | Thermal Shutdown Threshold (Note 6)   | $T_J$ Rising                    | –    | 145  | –    | $^\circ\text{C}$ |
|                              | Hysteresis (Note 6)                   | $T_J$ Falling                   | –    | 10   | –    |                  |
| $T_{CF}$                     | Thermal Regulation Threshold (Note 6) | Charge Current Reduction Begins | –    | 120  | –    | $^\circ\text{C}$ |
| $t_{INT}$                    | Detection Interval                    |                                 | –    | 2.1  | –    | s                |
| $t_{32S}$                    | 32-Second Timer (Note 7)              | Charger Enabled                 | 20.5 | 25.2 | 28.0 | s                |
|                              |                                       | Charger Disabled                | 18.0 | 25.2 | 34.0 |                  |
| $t_{15MIN}$                  | 15-Minute Timer                       | 15-Minute Mode                  | 12.0 | 13.5 | 15.0 | min              |
| $\Delta t_{LF}$              | Low-Frequency Timer Accuracy          | Charger Inactive                | –25  | –    | 25   | %                |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Negative current is current flowing from the battery to VBUS (discharging the battery).

5. Q2 always turns on for 60 ns, then turns off if current is below  $I_{SYNC}$ .

6. Guaranteed by design; not tested in production.

7. This tolerance (%) applies to all timers on the IC, including soft-start and deglitching timers.

## I<sup>2</sup>C TIMING SPECIFICATIONS (Guaranteed by design)

| Symbol  | Parameter                                       | Conditions                                | Min | Typ | Max  | Unit          |
|---------|-------------------------------------------------|-------------------------------------------|-----|-----|------|---------------|
| fSCL    | SCL Clock Frequency                             | Standard Mode                             | –   | –   | 100  | kHz           |
|         |                                                 | Fast Mode                                 | –   | –   | 400  |               |
|         |                                                 | High-Speed Mode, $C_B \leq 100\text{ pF}$ | –   | –   | 3400 |               |
|         |                                                 | High-Speed Mode, $C_B \leq 400\text{ pF}$ | –   | –   | 1700 |               |
| tBUF    | Bus-Free Time between STOP and START Conditions | Standard Mode                             | –   | 4.7 | –    | $\mu\text{s}$ |
|         |                                                 | Fast Mode                                 | –   | 1.3 | –    |               |
| tHD;STA | START or Repeated START Hold Time               | Standard Mode                             | –   | 4   | –    | $\mu\text{s}$ |
|         |                                                 | Fast Mode                                 | –   | 600 | –    | ns            |
|         |                                                 | High-Speed Mode                           | –   | 160 | –    | ns            |
| tLOW    | SCL LOW Period                                  | Standard Mode                             | –   | 4.7 | –    | $\mu\text{s}$ |
|         |                                                 | Fast Mode                                 | –   | 1.3 | –    | $\mu\text{s}$ |
|         |                                                 | High-Speed Mode, $C_B \leq 100\text{ pF}$ | –   | 160 | –    | ns            |
|         |                                                 | High-Speed Mode, $C_B \leq 400\text{ pF}$ | –   | 320 | –    | ns            |
| tHIGH   | SCL HIGH Period                                 | Standard Mode                             | –   | 4   | –    | $\mu\text{s}$ |
|         |                                                 | Fast Mode                                 | –   | 600 | –    | ns            |
|         |                                                 | High-Speed Mode, $C_B \leq 100\text{ pF}$ | –   | 60  | –    | ns            |
|         |                                                 | High-Speed Mode, $C_B \leq 400\text{ pF}$ | –   | 120 | –    | ns            |
| tSU;STA | Repeated START Setup Time                       | Standard Mode                             | –   | 4.7 | –    | $\mu\text{s}$ |
|         |                                                 | Fast Mode                                 | –   | 600 | –    | ns            |

# FAN54015

## I<sup>2</sup>C TIMING SPECIFICATIONS (Guaranteed by design) (continued)

| Symbol                             | Parameter                                                                                  | Conditions                               | Min                     | Typ | Max  | Unit |
|------------------------------------|--------------------------------------------------------------------------------------------|------------------------------------------|-------------------------|-----|------|------|
|                                    |                                                                                            | High-Speed Mode                          | –                       | 160 | –    | ns   |
| t <sub>SU;DAT</sub>                | Data Setup Time                                                                            | Standard Mode                            | –                       | 250 | –    | ns   |
|                                    |                                                                                            | Fast Mode                                | –                       | 100 | –    |      |
|                                    |                                                                                            | High-Speed Mode                          | –                       | 10  | –    |      |
| t <sub>HD;DAT</sub>                | Data Hold Time                                                                             | Standard Mode                            | 0                       | –   | 3.45 | μs   |
|                                    |                                                                                            | Fast Mode                                | 0                       | –   | 900  | ns   |
|                                    |                                                                                            | High-Speed Mode, C <sub>B</sub> ≤ 100 pF | 0                       | –   | 70   | ns   |
|                                    |                                                                                            | High-Speed Mode, C <sub>B</sub> ≤ 400 pF | 0                       | –   | 150  | ns   |
| t <sub>RCL</sub>                   | SCL Rise Time                                                                              | Standard Mode                            | 20 + 0.1 C <sub>B</sub> |     | 1000 | ns   |
|                                    |                                                                                            | Fast Mode                                | 20 + 0.1 C <sub>B</sub> |     | 300  |      |
|                                    |                                                                                            | High-Speed Mode, C <sub>B</sub> ≤ 100 pF | –                       | 10  | 80   |      |
|                                    |                                                                                            | High-Speed Mode, C <sub>B</sub> ≤ 400 pF | –                       | 20  | 160  |      |
| t <sub>FCL</sub>                   | SCL Fall Time                                                                              | Standard Mode                            | 20 + 0.1 C <sub>B</sub> |     | 300  | ns   |
|                                    |                                                                                            | Fast Mode                                | 20 + 0.1 C <sub>B</sub> |     | 300  |      |
|                                    |                                                                                            | High-Speed Mode, C <sub>B</sub> ≤ 100 pF | –                       | 10  | 40   |      |
|                                    |                                                                                            | High-Speed Mode, C <sub>B</sub> ≤ 400 pF | –                       | 20  | 80   |      |
| t <sub>RDA</sub> t <sub>RCL1</sub> | SDA Rise Time<br>Rise Time of SCL after a Repeated START<br>Condition<br>and after ACK Bit | Standard Mode                            | 20 + 0.1 C <sub>B</sub> |     | 1000 | ns   |
|                                    |                                                                                            | Fast Mode                                | 20 + 0.1 C <sub>B</sub> |     | 300  |      |
|                                    |                                                                                            | High-Speed Mode, C <sub>B</sub> ≤ 100 pF | –                       | 10  | 80   |      |
|                                    |                                                                                            | High-Speed Mode, C <sub>B</sub> ≤ 400 pF | –                       | 20  | 160  |      |
| t <sub>FDA</sub>                   | SDA Fall Time                                                                              | Standard Mode                            | 20 + 0.1 C <sub>B</sub> |     | 300  | ns   |
|                                    |                                                                                            | Fast Mode                                | 20 + 0.1 C <sub>B</sub> |     | 300  |      |
|                                    |                                                                                            | High-Speed Mode, C <sub>B</sub> ≤ 100 pF | –                       | 10  | 80   |      |
|                                    |                                                                                            | High-Speed Mode, C <sub>B</sub> ≤ 400 pF | –                       | 20  | 160  |      |
| t <sub>SU;STO</sub>                | Stop Condition Setup Time                                                                  | Standard Mode                            | –                       | 4   | –    | μs   |
|                                    |                                                                                            | Fast Mode                                | –                       | 600 | –    | ns   |
|                                    |                                                                                            | High-Speed Mode                          | –                       | 160 | –    | ns   |
| C <sub>B</sub>                     | Capacitive Load for SDA, SCL                                                               |                                          | –                       | –   | 400  | pF   |

## TIMING DIAGRAMS

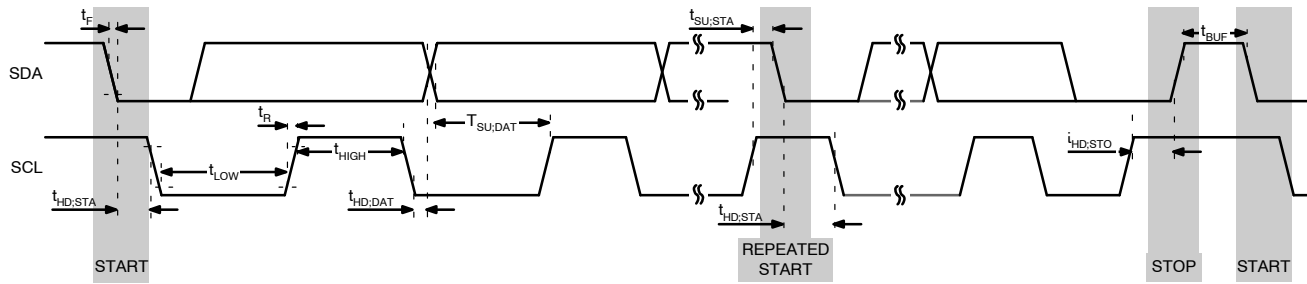


Figure 4. I²C Interface Timing for Fast and Slow Modes

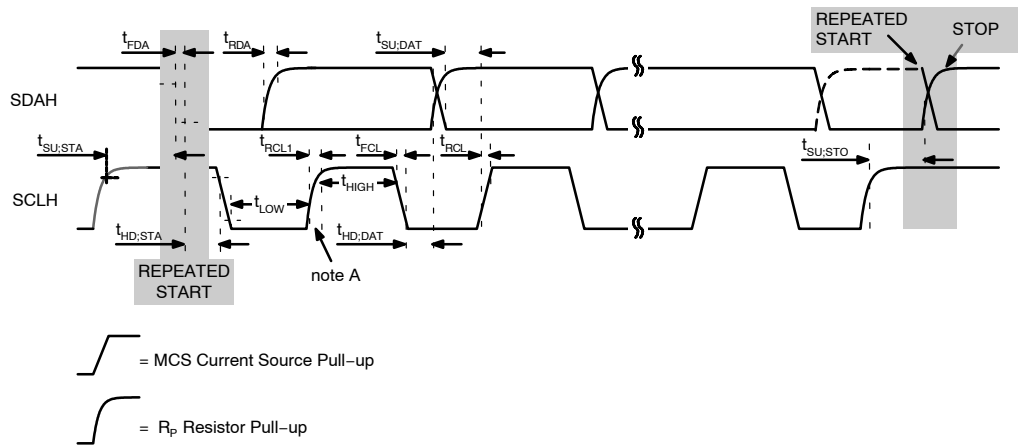


Figure 5. I²C Interface Timing for High-Speed Mode

## CHARGE MODE TYPICAL CHARACTERISTICS

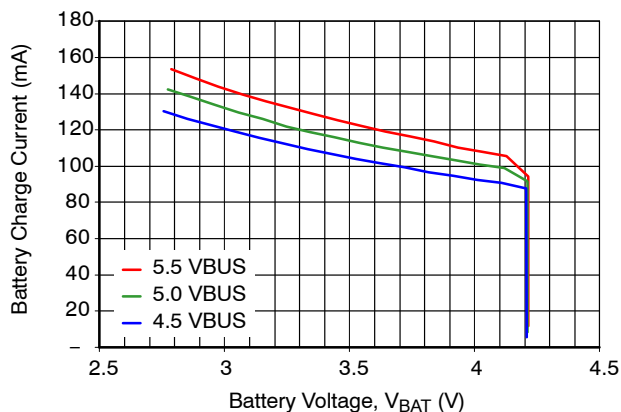
(Unless otherwise specified, circuit of Figure 1,  $V_{OREG} = 4.2\text{ V}$ ,  $V_{BUS} = 5.0\text{ V}$ , and  $T_A = 25^\circ\text{C}$ )

Figure 6. Battery Charge Current vs.  $V_{BUS}$  with  $I_{INLIM} = 100\text{ mA}$

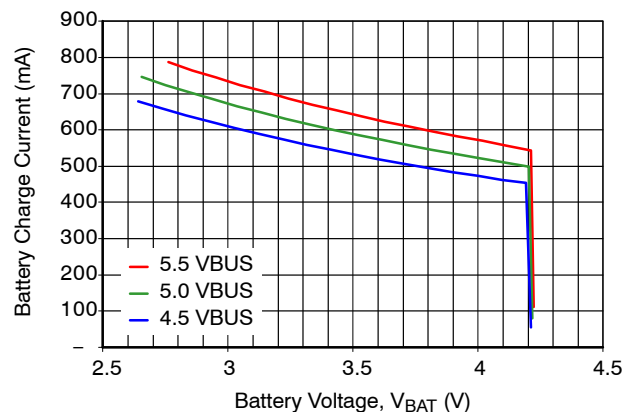


Figure 7. Battery Charge Current vs.  $V_{BUS}$  with  $I_{INLIM} = 500\text{ mA}$

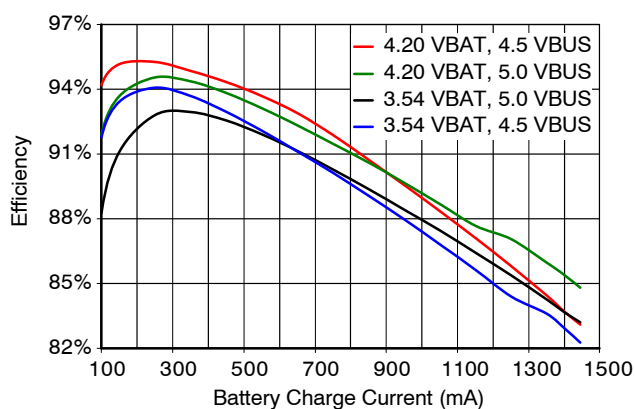


Figure 8. Charger Efficiency, No  $I_{INLIM}$ ,  $I_{CHARGE} = 1450\text{ mA}$

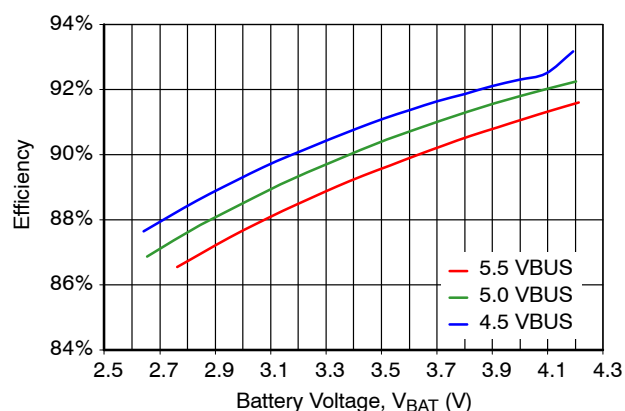


Figure 9. Charger Efficiency vs.  $V_{BUS}$ ,  $I_{INLIM} = 500\text{ mA}$

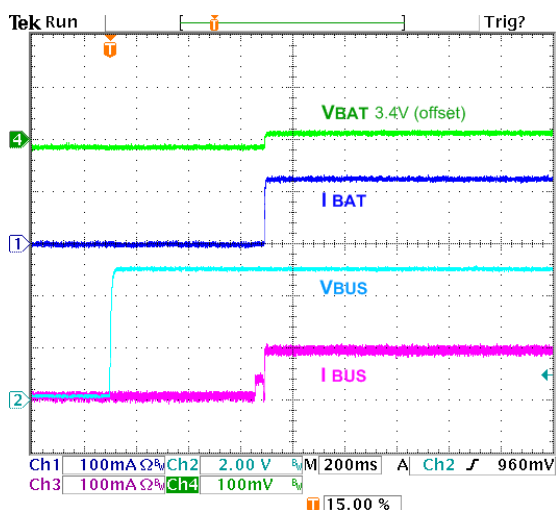


Figure 10. Auto-Charge Startup at  $V_{BUS}$  Plug-in,  $I_{INLIM} = 100\text{ mA}$ ,  $OTG = 1$ ,  $V_{BAT} = 3.4\text{ V}$

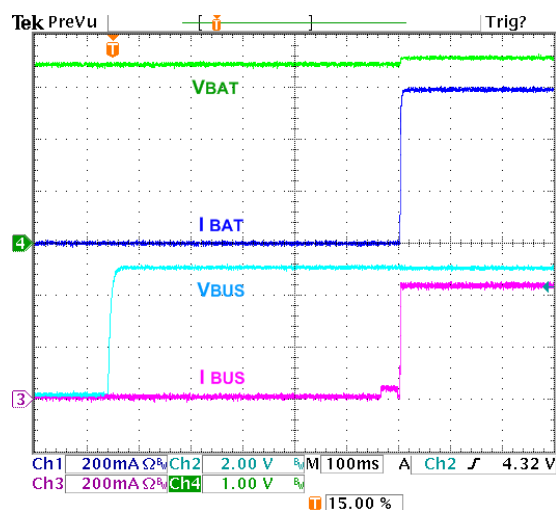


Figure 11. Auto-Charge Startup at  $V_{BUS}$  Plug-in,  $I_{INLIM} = 500\text{ mA}$ ,  $OTG=1$ ,  $V_{BAT} = 3.4\text{ V}$

## CHARGE MODE TYPICAL CHARACTERISTICS

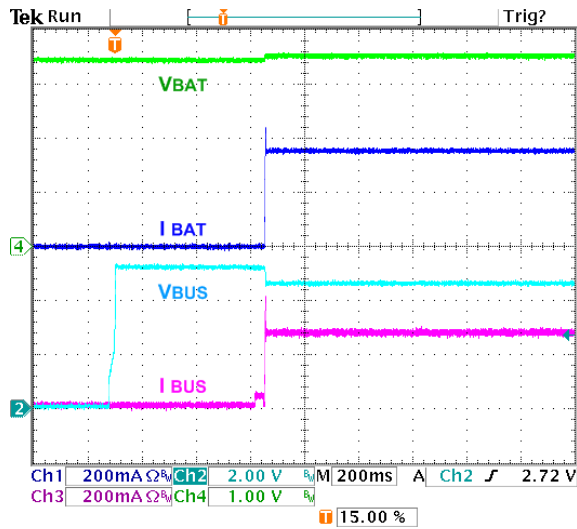
(Unless otherwise specified, circuit of Figure 1,  $V_{OREG} = 4.2\text{ V}$ ,  $V_{BUS} = 5.0\text{ V}$ , and  $T_A = 25^\circ\text{C}$ ) (continued)

Figure 12. AutoCharge Startup with 300mA Limited Charger / Adaptor,  $I_{INLIM} = 500\text{ mA}$ ,  $OTG = 1$ ,  $V_{BAT} = 3.4\text{ V}$

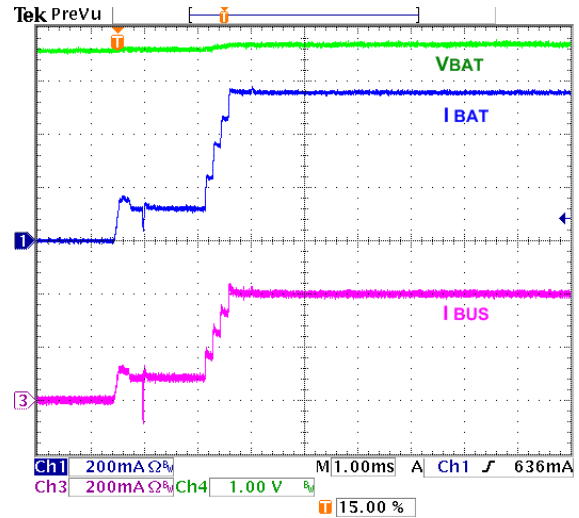


Figure 13. Charger Startup with HZ\_MODE Bit Reset,  $I_{INLIM} = 500\text{ mA}$ ,  $I_{OCHARGE} = 1050\text{ mA}$ ,  $OREG = 4.2\text{ V}$ ,  $V_{BAT} = 3.6\text{ V}$

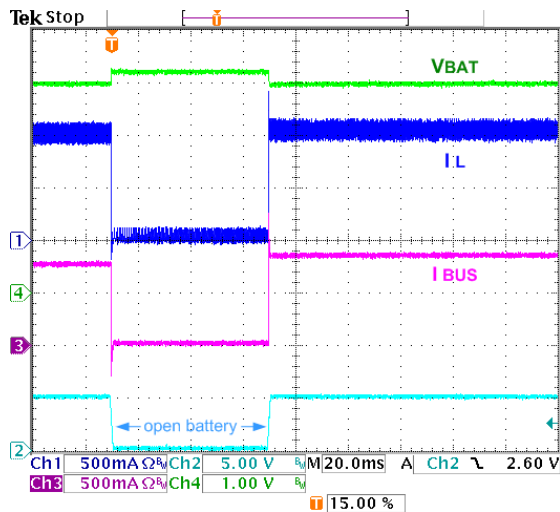


Figure 14. Battery Removal / Insertion During Charging,  $V_{BAT} = 3.9\text{ V}$ ,  $I_{OCHARGE} = 1050\text{ mA}$ , No  $I_{INLIM}$ ,  $TE = 0$

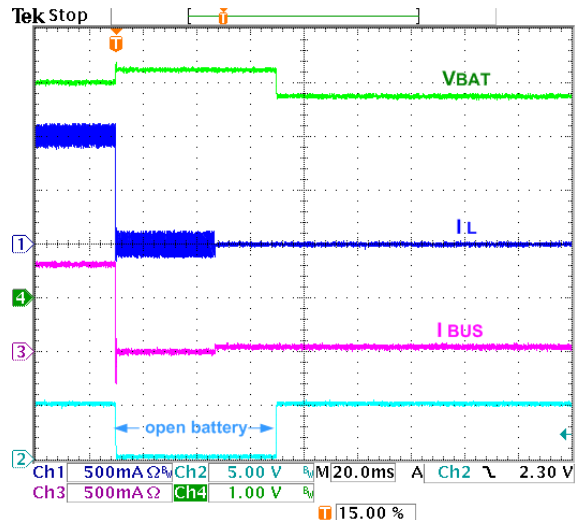
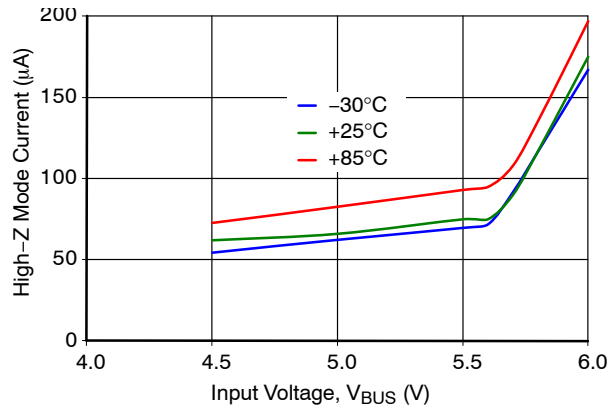
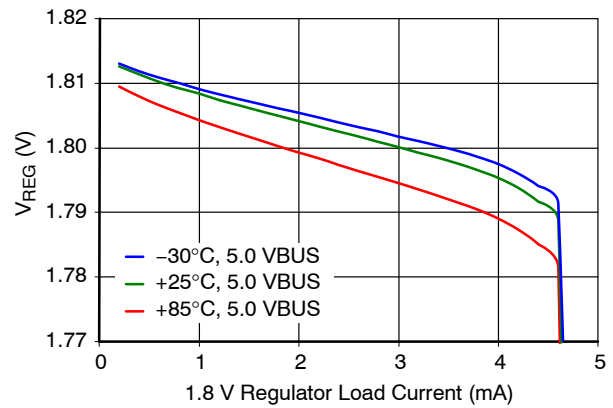
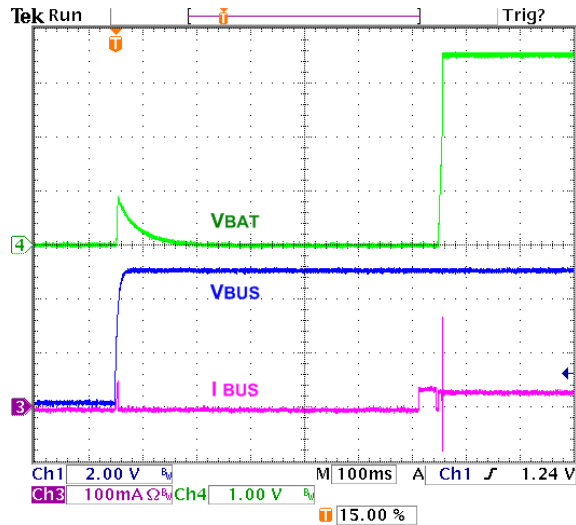
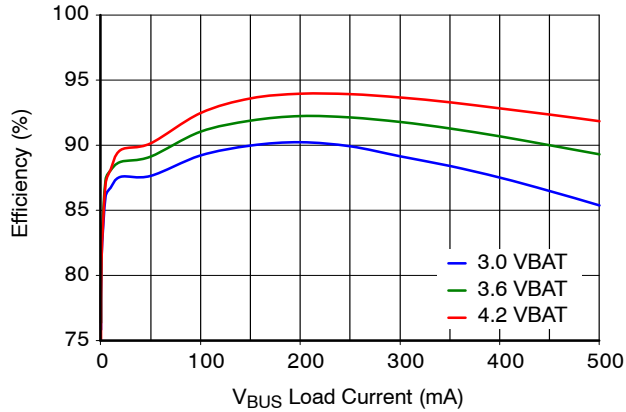
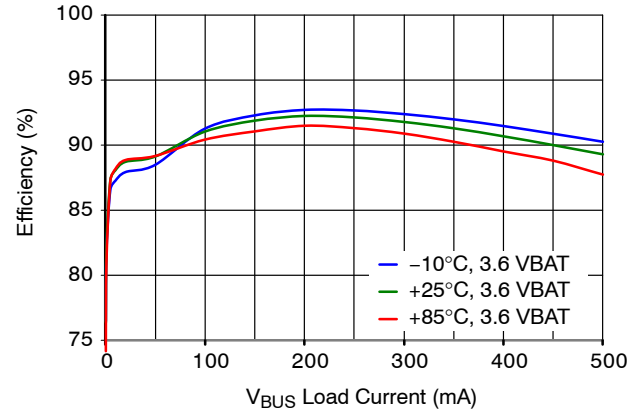
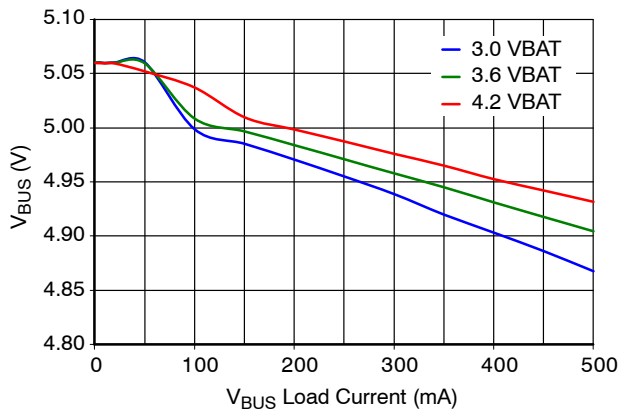
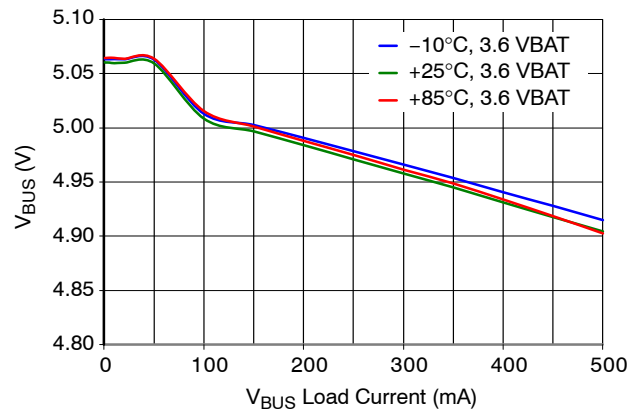
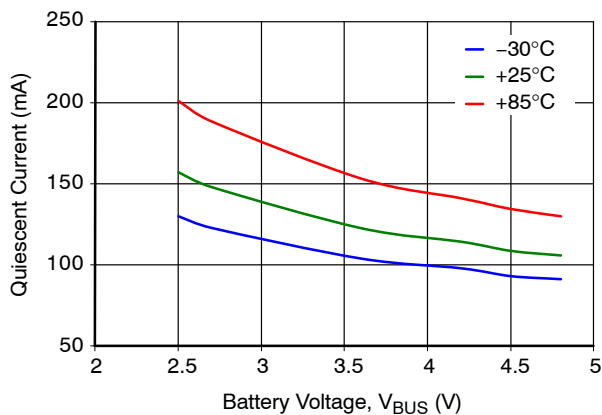
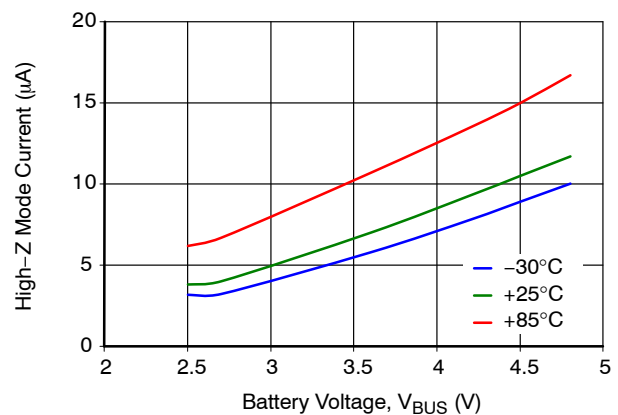
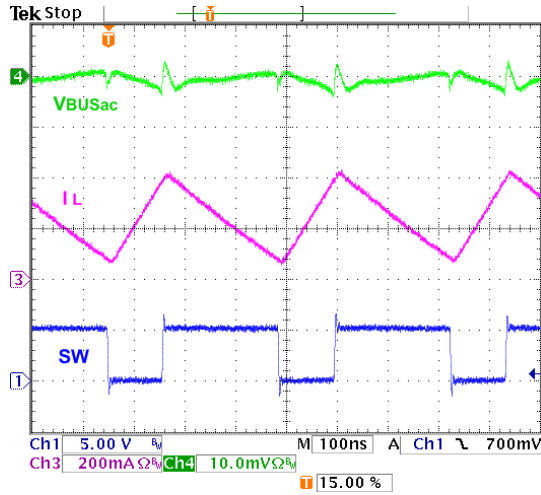
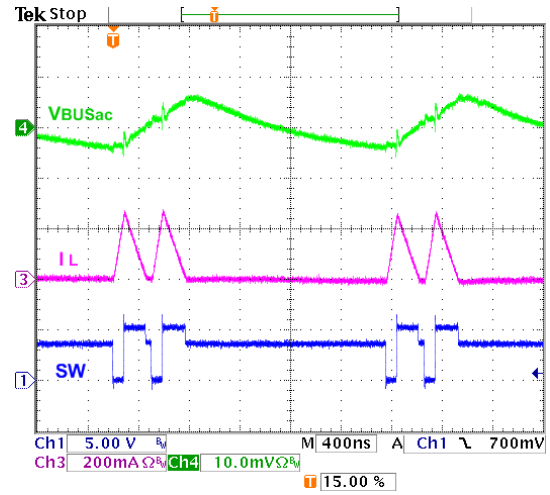
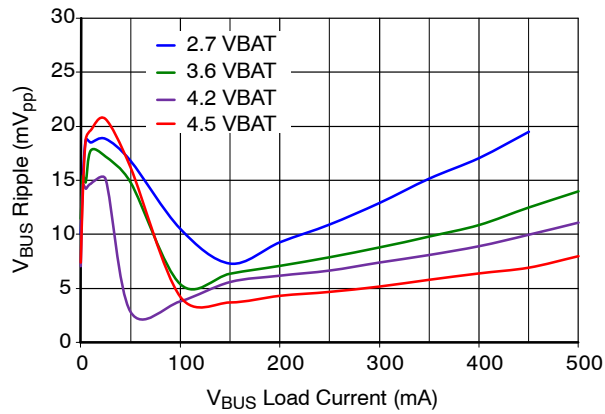
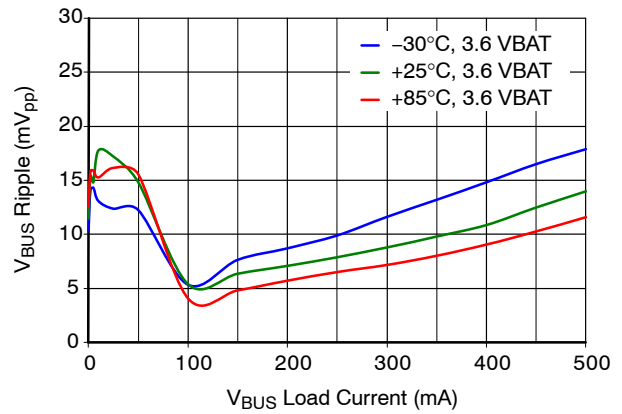


Figure 15. Battery Removal / Insertion During Charging,  $V_{BAT} = 3.9\text{ V}$ ,  $I_{OCHARGE} = 1050\text{ mA}$ , No  $I_{INLIM}$ ,  $TE = 1$

## CHARGE MODE TYPICAL CHARACTERISTICS

(Unless otherwise specified, circuit of Figure 1,  $V_{OREG} = 4.2\text{ V}$ ,  $V_{BUS} = 5.0\text{ V}$ , and  $T_A = 25^\circ\text{C}$ ) (continued)Figure 16.  $V_{BUS}$  Current in High-Impedance Mode with Battery OpenFigure 17.  $V_{REG}$  1.8 V Output RegulationFigure 18. No Battery,  $V_{BUS}$  at Power Up

**BOOST MODE TYPICAL CHARACTERISTICS**(Unless otherwise specified, using circuit of Figure 1,  $V_{BAT} = 3.6\text{ V}$ ,  $T_A = 25^\circ\text{C}$ )**Figure 19. Efficiency vs.  $V_{BAT}$** **Figure 20. Efficiency Over Temperature****Figure 21. Output Regulation vs.  $V_{BAT}$** **Figure 22. Output Regulation Over Temperature****Figure 23. Quiescent Current****Figure 24. High-Impedance Mode Battery Current**

**BOOST MODE TYPICAL CHARACTERISTICS**(Unless otherwise specified, using circuit of Figure 1,  $V_{BAT} = 3.6\text{ V}$ ,  $T_A = 25^\circ\text{C}$ )**Figure 27. Boost PWM Waveform****Figure 28. Boost PFM Waveform****Figure 25. Output Ripple vs.  $V_{BAT}$** **Figure 26. Output Ripple vs. Temperature**

## BOOST MODE TYPICAL CHARACTERISTICS

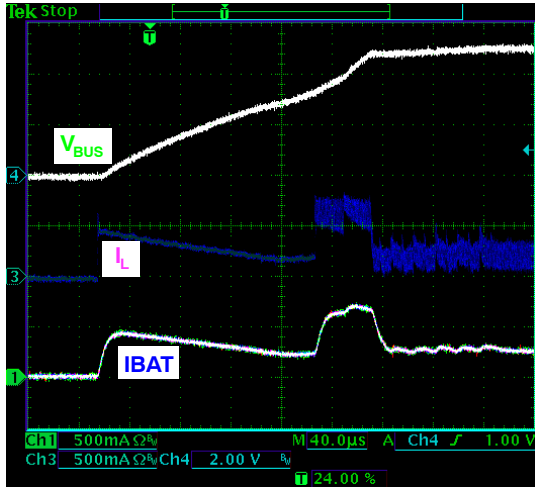
(Unless otherwise specified, using circuit of Figure 1,  $V_{BAT} = 3.6\text{ V}$ ,  $T_A = 25^\circ\text{C}$ )

Figure 29. Startup, 3.6  $V_{BAT}$ , 44  $\Omega$  Load, Additional 10  $\mu\text{F}$ , X5R Across  $V_{BUS}$

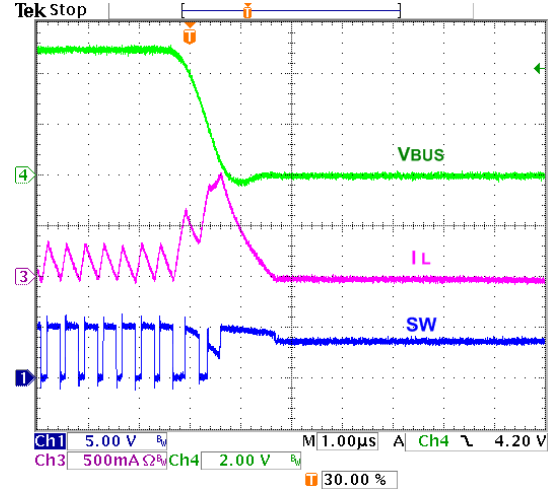


Figure 30.  $V_{BUS}$  Fault Response, 3.6  $V_{BAT}$

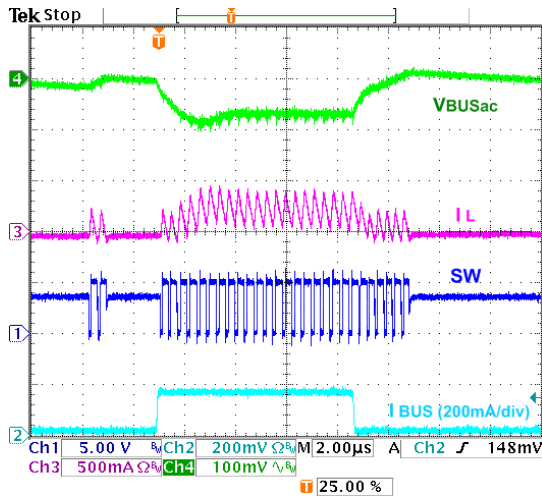


Figure 31. Load Transient, 5 – 155 – 5 mA,  
 $t_R = t_F = 100\text{ ns}$

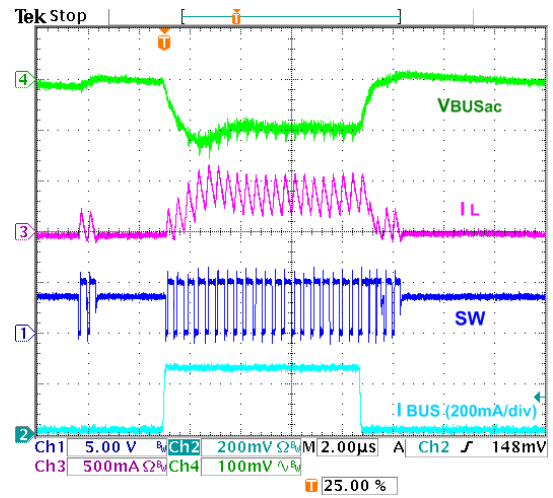


Figure 32. Load Transient, 5 – 255 – 5 mA,  
 $t_R = t_F = 100\text{ ns}$

## CIRCUIT DESCRIPTION / OVERVIEW

When charging batteries with a current-limited input source, such as USB, a switching charger's high efficiency over a wide range of output voltages minimizes charging time.

FAN54015 combines a highly integrated synchronous buck regulator for charging with a synchronous boost regulator, which can supply 5 V to USB On-The-Go (OTG) peripherals. The regulator employs synchronous rectification for both the charger and boost regulators to maintain high efficiency over a wide range of battery voltages and charge states.

The FAN54015 has three operating modes:

1. **Charge Mode:**  
Charges a single-cell Li-ion or Li-polymer battery.
2. **Boost Mode:**  
Provides 5 V power to USB-OTG with an integrated synchronous rectification boost regulator using the battery as input.
3. **High-Impedance Mode:**  
Both the boost and charging circuits are OFF in this mode. Current flow from VBUS to the battery or from the battery to VBUS is blocked in this mode. This mode consumes very little current from VBUS or the battery.

NOTE: Default settings are denoted by **bold typeface**.

### Charge Mode

In Charge Mode, FAN54015 employs four regulation loops:

1. **Input Current:** Limits the amount of current drawn from VBUS. This current is sensed internally and can be programmed through the I<sup>2</sup>C interface.
2. **Charging Current:** Limits the maximum charging current. This current is sensed using an external R<sub>SENSE</sub> resistor.
3. **Charge Voltage:** The regulator is restricted from exceeding this voltage. As the internal battery voltage rises, the battery's internal impedance and R<sub>SENSE</sub> work in conjunction with the charge voltage regulation to decrease the amount of current flowing to the battery. Battery charging is completed when the voltage across R<sub>SENSE</sub> drops below the I<sub>TERM</sub> threshold.
4. **Temperature:** If the IC's junction temperature reaches 120°C, charge current is reduced until the IC's temperature stabilizes at 120°C.
5. An additional loop limits the amount of drop on VBUS to a programmable voltage (V<sub>SP</sub>) to accommodate "special chargers" that limit current to a lower current than might be available from a "normal" USB wall charger.

### Battery Charging Curve

If the battery voltage is below V<sub>SHORT</sub>, a linear current source pre-charges the battery until V<sub>BAT</sub> reaches V<sub>SHORT</sub>. The PWM charging circuit is then started and the battery is charged with a constant current if sufficient input power is available. The current slew rate is limited to prevent overshoot.

The FAN54015 is designed to work with a current-limited input source at VBUS. During the current regulation phase of charging, I<sub>NLIM</sub> or the programmed charging current limits the amount of current available to charge the battery and power the system. The effect of I<sub>NLIM</sub> on I<sub>CHARGE</sub> can be seen in Figure 34.

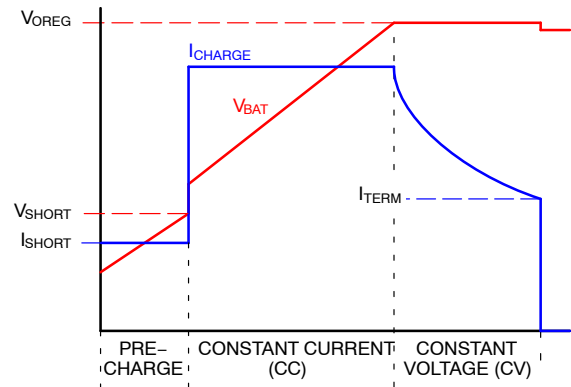


Figure 33. Charge Curve, I<sub>CHARGE</sub> Not Limited by I<sub>NLIM</sub>

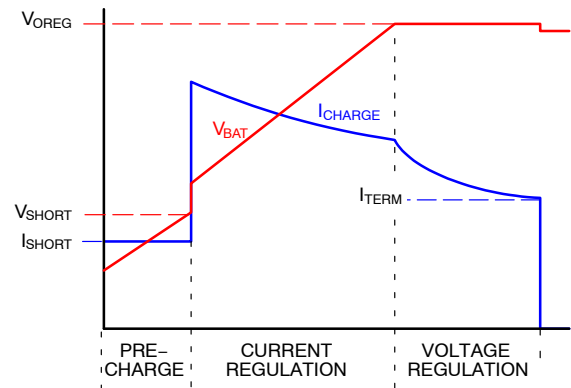


Figure 34. Charge Curve, I<sub>NLIM</sub> Limits I<sub>CHARGE</sub>

Assuming that V<sub>OREG</sub> is programmed to the cell's fully charged "float" voltage, the current that the battery accepts with the PWM regulator limiting its output (sensed at V<sub>BAT</sub>) to V<sub>OREG</sub> declines, and the charger enters the voltage regulation phase of charging. When the current declines to the programmed I<sub>TERM</sub> value, the charge cycle is complete. Charge current termination can be disabled by resetting the TE bit (REG1[3]).

The charger output or "float" voltage can be programmed by the OREG bits from 3.5 V to 4.44 V in 20 mV increments, as shown in Table 3.

**Table 3. OREG BITS (OREG[7:2]) VS. CHARGER  $V_{OUT}$  ( $V_{OREG}$ ) FLOAT VOLTAGE**

| Decimal | Hex | VOREG | Decimal | Hex | VOREG |
|---------|-----|-------|---------|-----|-------|
| 0       | 00  | 3.50  | 32      | 20  | 4.14  |
| 1       | 01  | 3.52  | 33      | 21  | 4.16  |
| 2       | 02  | 3.54  | 34      | 22  | 4.18  |
| 3       | 03  | 3.56  | 35      | 23  | 4.20  |
| 4       | 04  | 3.58  | 36      | 24  | 4.22  |
| 5       | 05  | 3.60  | 37      | 25  | 4.24  |
| 6       | 06  | 3.62  | 38      | 26  | 4.26  |
| 7       | 07  | 3.64  | 39      | 27  | 4.28  |
| 8       | 08  | 3.66  | 40      | 28  | 4.30  |
| 9       | 09  | 3.68  | 41      | 29  | 4.32  |
| 10      | 0A  | 3.70  | 42      | 2A  | 4.34  |
| 11      | 0B  | 3.72  | 43      | 2B  | 4.36  |
| 12      | 0C  | 3.74  | 44      | 2C  | 4.38  |
| 13      | 0D  | 3.76  | 45      | 2D  | 4.40  |
| 14      | 0E  | 3.78  | 46      | 2E  | 4.42  |
| 15      | 0F  | 3.80  | 47      | 2F  | 4.44  |
| 16      | 10  | 3.82  | 48      | 30  | 4.44  |
| 17      | 11  | 3.84  | 49      | 31  | 4.44  |
| 18      | 12  | 3.86  | 50      | 32  | 4.44  |
| 19      | 13  | 3.88  | 51      | 33  | 4.44  |
| 20      | 14  | 3.90  | 52      | 34  | 4.44  |
| 21      | 15  | 3.92  | 53      | 35  | 4.44  |
| 22      | 16  | 3.94  | 54      | 36  | 4.44  |
| 23      | 17  | 3.96  | 55      | 37  | 4.44  |
| 24      | 18  | 3.98  | 56      | 38  | 4.44  |
| 25      | 19  | 4.00  | 57      | 39  | 4.44  |
| 26      | 1A  | 4.02  | 58      | 3A  | 4.44  |
| 27      | 1B  | 4.04  | 59      | 3B  | 4.44  |
| 28      | 1C  | 4.06  | 60      | 3C  | 4.44  |
| 29      | 1D  | 4.08  | 61      | 3D  | 4.44  |
| 30      | 1E  | 4.10  | 62      | 3E  | 4.44  |

The following charging parameters can be programmed by the host through I<sup>2</sup>C:

**Table 4. PROGRAMMABLE CHARGING PARAMETERS**

| Parameter                      | Name        | Register  |
|--------------------------------|-------------|-----------|
| Output Voltage Regulation      | $V_{OREG}$  | REG2[7:2] |
| Battery Charging Current Limit | $I_{OCHRG}$ | REG4[6:4] |
| Input Current Limit            | $I_{INLIM}$ | REG1[7:6] |
| Charge Termination Limit       | $I_{TERM}$  | REG4[2:0] |
| Weak Battery Voltage           | $V_{LOWV}$  | REG1[5:4] |

A new charge cycle begins when one of the following occurs:

- The battery voltage falls below  $V_{OREG} - V_{RCH}$
- VBUS Power on Reset (POR) clears and the battery voltage is below the weak battery threshold ( $V_{LOWV}$ ).
- $\overline{CE}$  or HZ\_MODE is reset through I<sup>2</sup>C write to CONTROL1 (R1) register.

#### Charge Current Limit ( $I_{OCHARGE}$ )

**Table 5.  $I_{OCHARGE}$  (REG4 [6:4]) CURRENT AS FUNCTION OF  $I_{OCHARGE}$  BITS AND  $R_{SENSE}$  RESISTOR VALUES**

| DEC | BIN | HEX | $V_{RSENSE}$ (mV) | $I_{OCHARGE}$ (mA) |                |
|-----|-----|-----|-------------------|--------------------|----------------|
|     |     |     |                   | 68 m $\Omega$      | 100 m $\Omega$ |
| 0   | 000 | 00  | 37.4              | 550                | 374            |
| 1   | 001 | 01  | 44.2              | 650                | 442            |
| 2   | 010 | 02  | 51.0              | 750                | 510            |
| 3   | 011 | 03  | 57.8              | 850                | 578            |
| 4   | 100 | 04  | 71.4              | 1050               | 714            |
| 5   | 101 | 05  | 78.2              | 1150               | 782            |
| 6   | 110 | 06  | 91.8              | 1350               | 918            |
| 7   | 111 | 07  | 98.6              | 1450               | 986            |

#### Termination Current Limit

Current charge termination is enabled when TE (REG1[3]) = 1. Typical termination current values are given in Table 6.

**Table 6.  $I_{TERM}$  CURRENT AS FUNCTION OF  $I_{TERM}$  BITS (REG4[2:0]) AND  $R_{SENSE}$  RESISTOR VALUES**

| $I_{TERM}$ | $V_{RSENSE}$ (mV) | $I_{TERM}$ (mA) |                |
|------------|-------------------|-----------------|----------------|
|            |                   | 68 m $\Omega$   | 100 m $\Omega$ |
| 0          | 3.3               | 49              | 33             |
| 1          | 6.6               | 97              | 66             |
| 2          | 9.9               | 146             | 99             |
| 3          | 13.2              | 194             | 132            |
| 4          | 16.5              | 243             | 165            |
| 5          | 19.8              | 291             | 198            |
| 6          | 23.1              | 340             | 231            |
| 7          | 26.4              | 388             | 264            |

When the charge current falls below  $I_{TERM}$ , PWM charging stops and the STAT bits change to READY (00) for about 500 ms while the IC determines whether the battery and charging source are still connected. STAT then changes to CHARGE DONE (10), provided the battery and charger are still connected.

### PWM Controller in Charge Mode

The IC uses a current-mode PWM controller to regulate the output voltage and battery charge currents. The synchronous rectifier (Q2) has a current limit that which off the FET when the current is negative by more than 140 mA peak. This prevents current flow from the battery.

### Safety Timer

*Section references Figure 39.*

At the beginning of charging, the IC starts a 15-minute timer ( $t_{15MIN}$ ). When this times out, charging is terminated. Writing to any register through I<sup>2</sup>C stops and resets the  $t_{15MIN}$  timer, which in turn starts a 32-second timer ( $t_{32S}$ ). Setting the TMR\_RST bit (REG0[7]) resets the  $t_{32S}$  timer. If the  $t_{32S}$  timer times out; charging is terminated, the registers are set to their default values, and charging resumes using the default values with the  $t_{15MIN}$  timer running.

Normal charging is controlled by the host with the  $t_{32S}$  timer running to ensure that the host is alive. Charging with the  $t_{15MIN}$  timer running is used for charging that is unattended by the host. If the  $t_{15MIN}$  timer expires; the IC turns off the charger, sets the CE bit, and indicates a timer fault (110) on the FAULT bits (REG0[2:0]). This sequence prevents overcharge if the host fails to reset the  $t_{32S}$  timer.

### VBUS POR / Non-Compliant Charger Rejection

When the IC detects that VBUS has risen above  $V_{IN(MIN)1}$  (4.4 V), the IC applies a 100  $\Omega$  load from VBUS to GND. To clear the VBUS POR (Power-On-Reset) and begin charging, VBUS must remain above  $V_{IN(MIN)1}$  and below  $VBUS_{OVP}$  for  $t_{VBUS\_VALID}$  (30 ms) before the IC initiates charging. The VBUS validation sequence always occurs before charging is initiated or re-initiated (for example, after a VBUS OVP fault or a  $V_{RCH}$  recharge initiation).

$t_{VBUS\_VALID}$  ensures that unfiltered 50 / 60 Hz chargers and other non-compliant chargers are rejected.

### USB-Friendly Boot Sequence

At VBUS POR, when the battery voltage is above the weak battery threshold ( $V_{LOWV}$ ), the IC operates in accordance with its I<sup>2</sup>C register settings. If  $V_{BAT} < V_{LOWV}$ , the IC sets all registers to their default values and enables the charger using an input current limit controlled by the OTG pin (100 mA if OTG is LOW and 500 mA if OTG is HIGH). This feature can revive a battery whose voltage is too low to ensure reliable host operation. Charging continues in the absence of host communication even after the battery has reached  $V_{OREG}$ , whose default value is 3.54 V, and the charger remains active until  $t_{15MIN}$  times out. Once the host processor begins writing to the IC, charging parameters are set by the host, which must continually reset the  $t_{32S}$  timer to continue charging using the programmed charging parameters. If  $t_{32S}$  times out, the register defaults are loaded, the FAULT bits are set to 110, STAT is pulsed HIGH, and charging continues with default charge parameters.

### Input Current Limiting

To minimize charging time without overloading VBUS current limitations, the IC's input current limit can be programmed by the  $I_{NLIM}$  bits (REG1[7:6]).

**Table 7. INPUT CURRENT LIMIT**

| $I_{NLIM}$ REG1[7:6] | Input Current Limit |
|----------------------|---------------------|
| 00                   | 100 mA              |
| 01                   | 500 mA              |
| 10                   | 800 mA              |
| 11                   | No limit            |

The OTG pin establishes the input current limit when  $t_{15MIN}$  is running.

## FLOW CHARTS

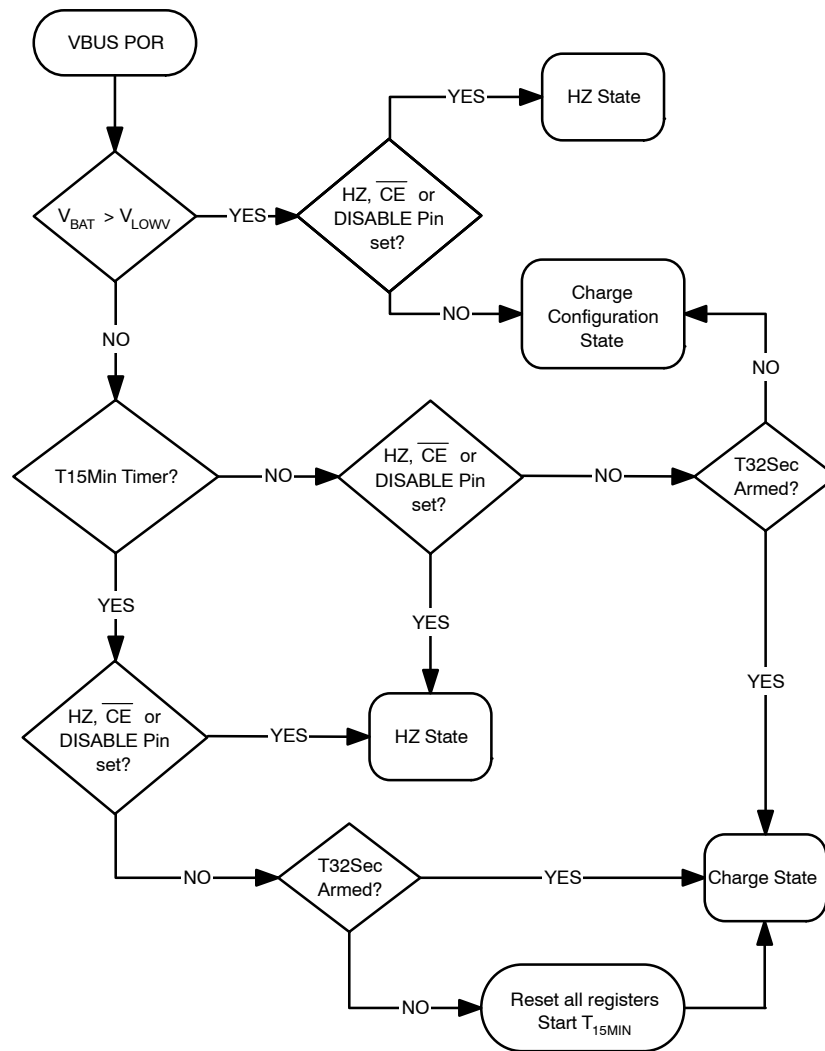


Figure 35. Charger VBUS PO

## FLOW CHARTS (continued)

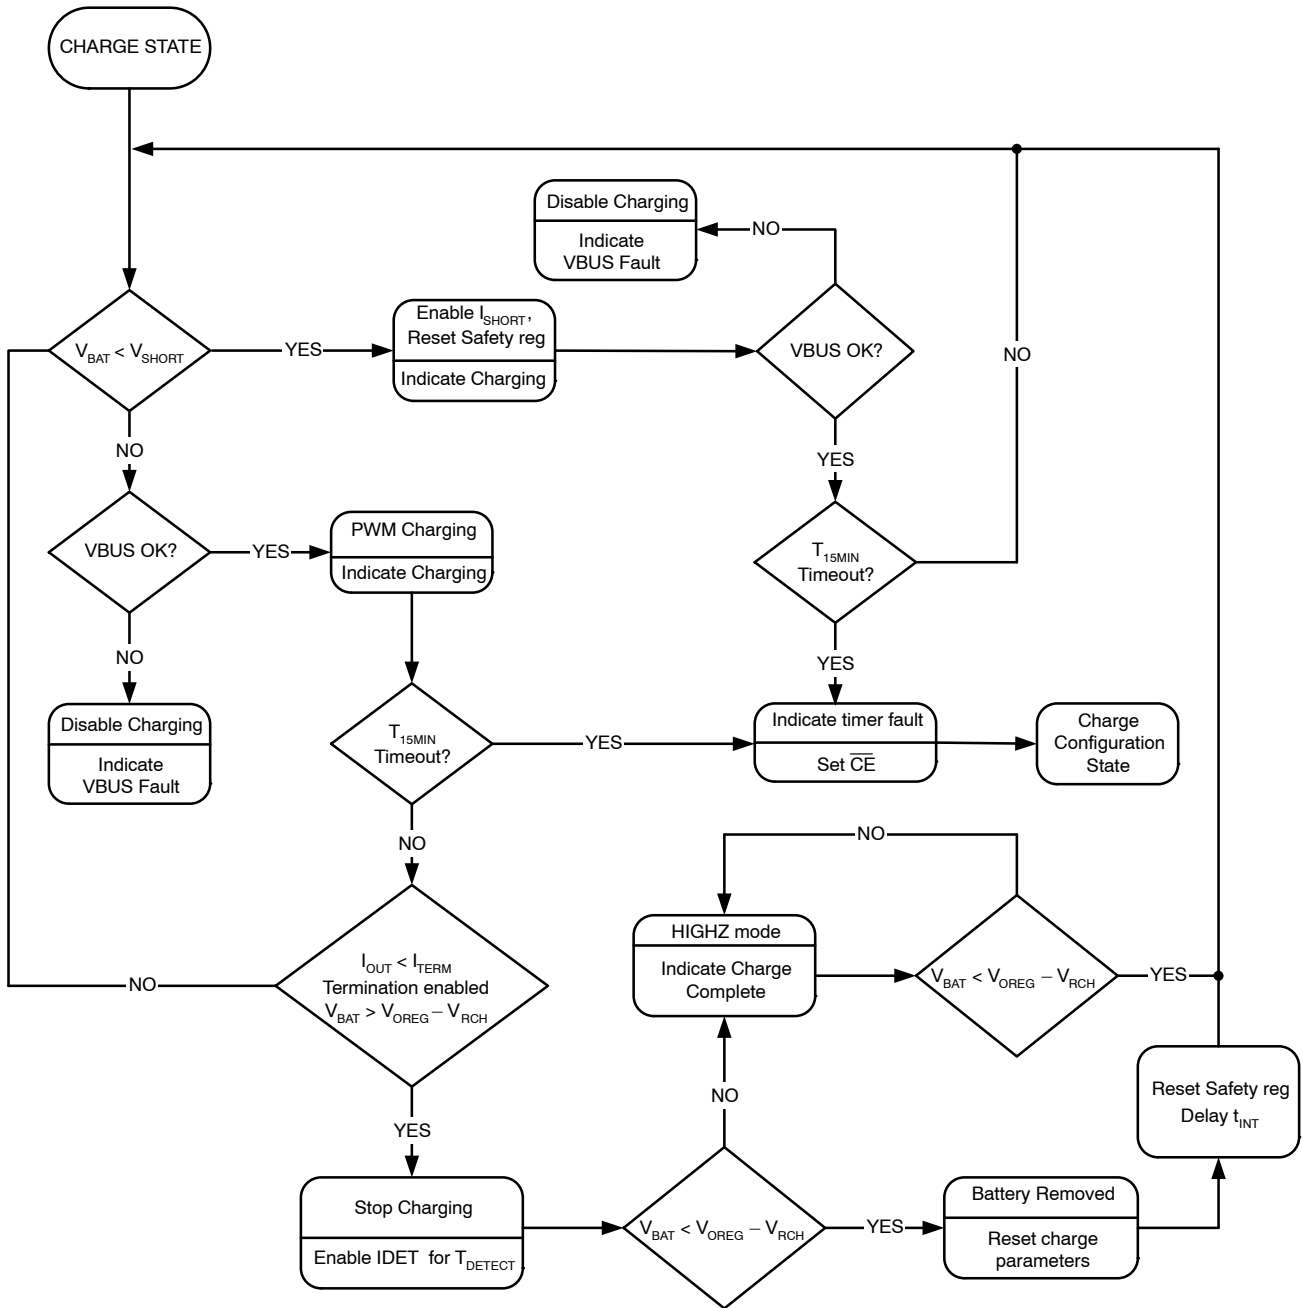


Figure 36. Charge Mode

## FLOW CHARTS (continued)

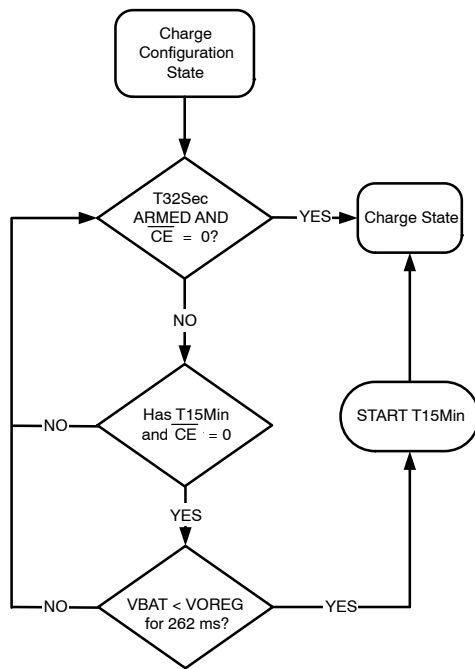


Figure 37. Charge Configuration

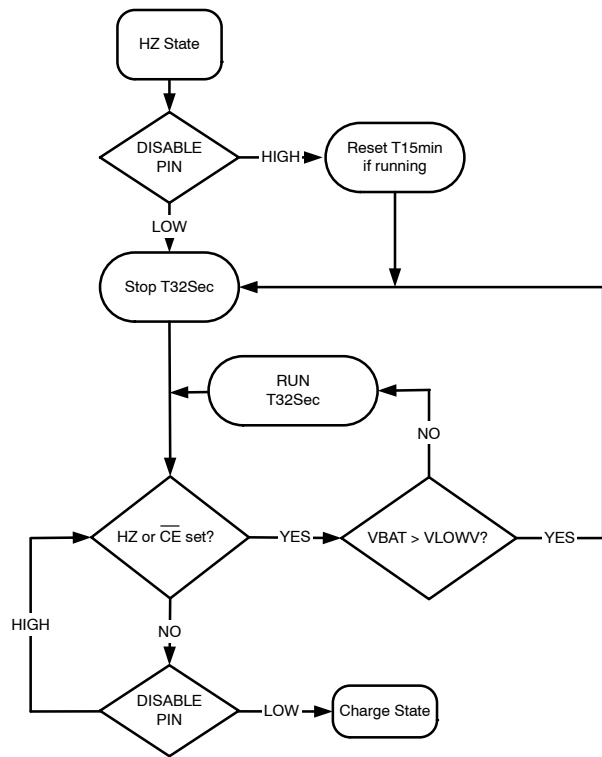


Figure 38. HZ-State

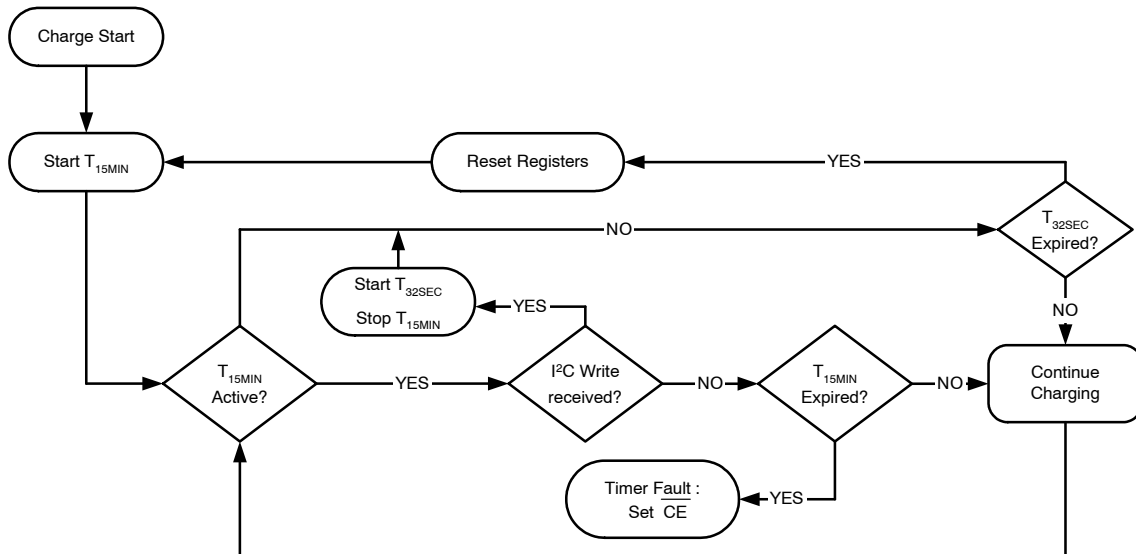


Figure 39. Timer Flow Chart

### Special Charger

The FAN54015 has additional functionality to limit input current in case a current-limited “special charger” is supplying V<sub>BUS</sub>. These slowly increase the charging current until either:

- I<sub>INLIM</sub> or I<sub>CHARGE</sub> is reached

or

- V<sub>BUS</sub> = V<sub>SP</sub>

If V<sub>BUS</sub> collapses to V<sub>SP</sub> when the current is ramping up, the FAN54015 charge with an input current that keeps V<sub>BUS</sub> = V<sub>SP</sub>. When the V<sub>SP</sub> control loop is limiting the charge current, the SP bit (REG5[4]) is set.

**Table 8. V<sub>SP</sub> AS FUNCTION OF SP BITS (REG5[2:0])**

| SP (REG5[2:0]) |            |           | V <sub>SP</sub> |
|----------------|------------|-----------|-----------------|
| DEC            | BIN        | HEX       |                 |
| 0              | 000        | 00        | 4.213           |
| 1              | 001        | 01        | 4.293           |
| 2              | 010        | 02        | 4.373           |
| 3              | 011        | 03        | 4.453           |
| <b>4</b>       | <b>100</b> | <b>04</b> | <b>4.533</b>    |
| 5              | 101        | 05        | 4.613           |
| 6              | 110        | 06        | 4.693           |
| 7              | 111        | 07        | 4.773           |

### Safety Settings

FAN54015 contain a SAFETY register (REG6) that prevents the values in OREG (REG2[7:2]) and IOCHARGE (REG4[6:4]) from exceeding the values of the VSAFE and ISAFE values.

After V<sub>BAT</sub> exceeds V<sub>SHORT</sub>, the SAFETY register is loaded with its default value and may be written only before any other register is written. The entire desired Safety register value should be written twice to ensure the register bits are set. After writing to any other register, the SAFETY register is locked until V<sub>BAT</sub> falls below V<sub>SHORT</sub>.

The ISAFE (REG6[6:4]) and VSAFE (REG6[3:0]) registers establish values that limit the maximum values of IOCHARGE and VOREG used by the control logic. If the host attempts to write a value higher than VSAFE or ISAFE to OREG or IOCHARGE, respectively; the VSAFE, ISAFE value appears as the OREG, IOCHARGE register value, respectively.

**Table 9. I<sub>SAFE</sub> (I<sub>CHARGE</sub> LIMIT) AS FUNCTION OF ISAFE BITS (REG6[6:4])**

| ISAFE (REG6[6:4]) |            |           | V <sub>RSENSE</sub> (mV) | I <sub>SAFE</sub> (mA) |            |
|-------------------|------------|-----------|--------------------------|------------------------|------------|
| DEC               | BIN        | HEX       |                          | 68 mΩ                  | 100 mΩ     |
| 0                 | 000        | 00        | 37.4                     | 550                    | 374        |
| 1                 | 001        | 01        | 44.2                     | 650                    | 442        |
| 2                 | 010        | 02        | 51.0                     | 750                    | 510        |
| 3                 | 011        | 03        | 57.8                     | 850                    | 578        |
| <b>4</b>          | <b>100</b> | <b>04</b> | <b>71.4</b>              | <b>1050</b>            | <b>714</b> |
| 5                 | 101        | 05        | 78.2                     | 1150                   | 782        |
| 6                 | 110        | 06        | 91.8                     | 1350                   | 918        |
| 7                 | 111        | 07        | 98.6                     | 1450                   | 986        |

**Table 10. V<sub>SAFE</sub> (V<sub>OREG</sub> LIMIT) AS FUNCTION OF VSAFE BITS (REG6[3:0])**

| VSAFE (REG6[3:0]) |             |           | Max. OREG (REG2[7:2]) | VOREG Max.  |
|-------------------|-------------|-----------|-----------------------|-------------|
| DEC               | BIN         | HEX       |                       |             |
| <b>0</b>          | <b>0000</b> | <b>00</b> | <b>100011</b>         | <b>4.20</b> |
| 1                 | 0001        | 01        | 100100                | 4.22        |
| 2                 | 0010        | 02        | 100101                | 4.24        |
| 3                 | 0011        | 03        | 100110                | 4.26        |
| 4                 | 0100        | 04        | 100111                | 4.28        |
| 5                 | 0101        | 05        | 101000                | 4.30        |
| 6                 | 0110        | 06        | 101001                | 4.32        |
| 7                 | 0111        | 07        | 101010                | 4.34        |
| 8                 | 1000        | 08        | 101011                | 4.36        |
| 9                 | 1001        | 09        | 101100                | 4.38        |
| 10                | 1010        | 0A        | 101101                | 4.40        |
| 11                | 1011        | 0B        | 101110                | 4.42        |
| 12                | 1100        | 0C        | 101111                | 4.44        |
| 13                | 1101        | 0D        | 110000                | 4.44        |
| 14                | 1110        | 0E        | 110001                | 4.44        |
| 15                | 1111        | 0F        | 110010                | 4.44        |

### Thermal Regulation and Protection

When the IC's junction temperature reaches  $T_{CF}$  (about 120°C), the charger reduces its output current to 550 mA to prevent overheating. If the temperature increases beyond  $T_{SHUTDOWN}$ ; charging is suspended, the FAULT bits are set to 101, and STAT is pulsed HIGH. In Suspend Mode, all timers stop and the state of the IC's logic is preserved. Charging resumes at programmed current after the die cools to about 120°C.

Additional  $\theta_{JA}$  data points, measured using the FAN54015 evaluation board, are given in Table 11 (measured with  $T_A = 25^\circ\text{C}$ ). Note that as power dissipation increases, the effective  $\theta_{JA}$  decreases due to the larger difference between the die temperature and ambient.

**Table 11. EVALUATION BOARD MEASURED  $\theta_{JA}$**

| Power (W) | $\theta_{JA}$ |
|-----------|---------------|
| 0.504     | 54°C/W        |
| 0.844     | 50°C/W        |
| 1.506     | 46°C/W        |

### Charge Mode Input Supply Protection

#### Sleep Mode

When  $V_{BUS}$  falls below  $V_{BAT} + V_{SLP}$ , and  $V_{BUS}$  is above  $V_{IN(MIN)}$ , the IC enters Sleep Mode to prevent the battery from draining into  $V_{BUS}$ . During Sleep Mode, reverse current is disabled by body switching Q1.

#### Input Supply Low–Voltage Detection

The IC continuously monitors  $V_{BUS}$  during charging. If  $V_{BUS}$  falls below  $V_{IN(MIN)}$ , the IC:

1. Terminates charging
2. Pulses the STAT pin, sets the STAT bits to 11, and sets the FAULT bits to 011.

If  $V_{BUS}$  recovers above the  $V_{IN(MIN)}$  rising threshold after time  $t_{INT}$  (about two seconds), the charging process is repeated. This function prevents the USB power bus from collapsing or oscillating when the IC is connected to a suspended USB port or a low–current–capable OTG device.

#### Input Over–Voltage Detection

When the  $V_{BUS}$  exceeds  $V_{BUS_{OVP}}$ , the IC:

1. Turns off Q3
2. Suspends charging
3. Sets the FAULT bits to 001, sets the STAT bits to 11, and pulses the STAT pin.

When  $V_{BUS}$  falls about 150 mV below  $V_{BUS_{OVP}}$ , the fault is cleared and charging resumes after  $V_{BUS}$  is revalidated (see [VBUS POR / Non–Compliant Charger Rejection](#)).

#### VBUS Short While Charging

If  $V_{BUS}$  is shorted with a very low impedance while the IC is charging with  $I_{INLIMIT} = 100\text{ mA}$ , the IC may not meet datasheet specifications until power is removed. To trigger

this condition,  $V_{BUS}$  must be driven from 5 V to GND with a high slew rate. Achieving this slew rate requires a 0  $\Omega$  short to the USB cable less than 10 cm from the connector.

### Charge Mode Battery Detection & Protection

#### VBAT Over–Voltage Protection

The OREG voltage regulation loop prevents  $V_{BAT}$  from overshooting the OREG voltage by more than 50 mV when the battery is removed. When the PWM charger runs with no battery, the TE bit is not set and a battery is inserted that is charged to a voltage higher than  $V_{OREG}$ ; PWM pulses stop. If no further pulses occur for 30 ms, the IC sets the FAULT bits to 100, sets the STAT bits to 11, and pulses the STAT pin.

#### Battery Detection During Charging

The IC can detect the presence, absence, or removal of a battery if the termination bit (TE) is set. During normal charging, once  $V_{BAT}$  is close to  $V_{OREG}$  and the termination charge current is detected, the IC terminates charging and sets the STAT bits to 10. It then turns on a discharge current,  $I_{DETECT}$ , for  $t_{DETECT}$ . If  $V_{BAT}$  is still above  $V_{OREG} - V_{RCH}$ , the battery is present and the IC sets the FAULT bits to 000. If  $V_{BAT}$  is below  $V_{OREG} - V_{RCH}$ , the battery is absent and the IC:

1. Sets the registers to their default values.
2. Sets the FAULT bits to 111.
3. Resumes charging with default values after  $t_{INT}$ .

#### Battery Short–Circuit Protection

If the battery voltage is below the short–circuit threshold ( $V_{SHORT}$ ); a linear current source,  $I_{SHORT}$ , supplies  $V_{BAT}$  until  $V_{BAT} > V_{SHORT}$ .

### System Operation with No Battery

The FAN54015 continues charging after  $V_{BUS}$  POR with the default parameters, regulating the  $V_{BAT}$  line to 3.54 V until the host processor issues commands or the 15–minute timer expires. In this way, the FAN54015 can start the system without a battery.

The FAN54015 soft–start function can interfere with the system supply with battery absent. The soft–start activates whenever  $V_{OREG}$ ,  $I_{INLIM}$ , or  $I_{OCHARGE}$  are set from a lower to higher value. During soft–start, the  $I_{IN}$  limit drops to 100 mA for about 1 ms unless  $I_{INLIM}$  is set to 11 (no limit). This could cause the system processor to fail to start. To avoid this behavior, use the following sequence.

1. Set the OTG pin HIGH. When  $V_{BUS}$  is plugged in,  $I_{INLIM}$  is set to 500 mA until the system processor powers up and can set parameters through I<sup>2</sup>C.
2. Program the Safety Register.
3. Set  $I_{INLIM}$  to 11 (no limit).
4. Set OREG to the desired value (typically 4.18).
5. Reset the IO\_LEVEL bit, then set IOCHARGE.
6. Set  $I_{INLIM}$  to 500 mA if a USB source is connected.

During the initial system startup, while the charger IC is being programmed, the system current is limited to 500 mA for 1 ms during steps 4 and 5. This is the value of the soft-start ICHARGE current used when  $I_{INLIM}$  is set to No Limit.

If the system is powered up without a battery present, the CV bit should be set. When a battery is inserted, the CV bit is cleared.

#### Charger Status / Fault Status

The STAT pin indicates the operating condition of the IC and provides a fault indicator for interrupt driven systems.

**Table 12. STAT PIN FUNCTION**

| EN_STAT | Charge State              | STAT Pin                     |
|---------|---------------------------|------------------------------|
| 0       | X                         | OPEN                         |
| X       | Normal Conditions         | OPEN                         |
| 1       | Charging                  | LOW                          |
| X       | Fault (Charging or Boost) | 128 $\mu$ s Pulse, then OPEN |

The FAULT bits (R0[2:0]) indicate the type of fault in Charge Mode (see Table 13).

**Table 13. FAULT STATUS BITS DURING CHARGE MODE**

| Fault Bit |    |    | Fault Description |
|-----------|----|----|-------------------|
| B2        | B1 | B0 |                   |
| 0         | 0  | 0  | Normal (No Fault) |
| 0         | 0  | 1  | VBUS OVP          |
| 0         | 1  | 0  | Sleep Mode        |
| 0         | 1  | 1  | Poor Input Source |
| 1         | 0  | 0  | Battery OVP       |
| 1         | 0  | 1  | Thermal Shutdown  |
| 1         | 1  | 0  | Timer Fault       |
| 1         | 1  | 1  | No Battery        |

#### Charge Mode Control Bits

Setting either HZ\_MODE or  $\overline{CE}$  through I<sup>2</sup>C disables the charger and puts the IC into High-Impedance Mode and resets  $t_{32S}$ . If  $V_{BAT} < V_{LOWV}$  while in High-Impedance Mode,  $t_{32S}$  begins running and, when it overflows, all registers (except SAFETY) reset, which enables  $t_{15MIN}$  charging on versions with the 15-minute timer.

When  $t_{15MIN}$  overflows, the IC sets the  $\overline{CE}$  bit and the IC enters High-Impedance Mode. If  $\overline{CE}$  was set by  $t_{15MIN}$  overflow, a new charge cycle can only be initiated through I<sup>2</sup>C or VBUS POR.

Setting the RESET bit clears all registers. If HZ\_MODE or  $\overline{CE}$  bits were set when the RESET bit is set, these bits are also cleared, but the  $t_{32S}$  timer is not started, and the IC remains in High-Impedance Mode.

**Table 14. DISABLE PIN AND  $\overline{CE}$  BIT FUNCTIONALITY**

| Charging | DISABLE Pin | $\overline{CE}$ | HZ_MODE |
|----------|-------------|-----------------|---------|
| ENABLE   | 0           | 0               | 0       |
| DISABLE  | X           | 1               | X       |
| DISABLE  | X           | X               | 1       |
| DISABLE  | 1           | X               | X       |

Raising the DISABLE pin stops  $t_{32S}$  from advancing, but does not reset it. If the DISABLE pin is raised during  $t_{15MIN}$  charging, the  $t_{15MIN}$  timer is reset.

#### Operational Mode Control

OPA\_MODE (REG1[0]) and the HZ\_MODE (REG1[1]) bits in conjunction with the FAULT state define the operational mode of the charger.

**Table 15. OPERATION MODE CONTROL**

| HZ_MODE | OPA_MODE | FAULT | Operation Mode   |
|---------|----------|-------|------------------|
| 0       | 0        | 0     | Charge           |
| 0       | X        | 1     | Charge Configure |
| 0       | 1        | 0     | Boost            |
| 1       | X        | X     | High Impedance   |

The IC resets the OPA\_MODE bit whenever the boost is deactivated, whether due to a fault or being disabled by setting the HZ\_MODE bit.

#### BOOST MODE

Boost Mode can be enabled if the IC is in 32-Second Mode with the OTG pin and OPA\_MODE bits as indicated in Table 16. The OTG pin ACTIVE state is 1 if OTG\_PL = 1 and 0 when OTG\_PL = 0.

If boost is active using the OTG pin, Boost Mode is initiated even if the HZ\_MODE = 1. The HZ\_MODE bit overrides the OPA\_MODE bit.

**Table 16. ENABLING BOOST**

| OTG_EN | OTG Pin | HZ_MODE | OPA_MODE | BOOST    |
|--------|---------|---------|----------|----------|
| 1      | ACTIVE  | X       | X        | Enabled  |
| X      | X       | 0       | 1        | Enabled  |
| X      | ACTIVE  | X       | 0        | Disabled |
| 0      | X       | 1       | X        | Disabled |
| 1      | ACTIVE  | 1       | 1        | Disabled |
| 0      | ACTIVE  | 0       | 0        | Disabled |


To remain in Boost Mode, the TMR\_RST must be set by the host before the  $t_{32S}$  timer times out. If  $t_{32S}$  times out in Boost Mode; the IC resets all registers, pulses the STAT pin, sets the FAULT bits to 110, and resets the BOOST bit. VBUS POR or reading R0 clears the fault condition.

### Boost PWM Control

The IC uses a minimum on–time and computed minimum off– time to regulate V<sub>BUS</sub>. The regulator achieves excellent transient response by employing current–mode modulation. This technique causes the regulator to exhibit a load line.

During PWM Mode, the output voltage drops slightly as the input current rises. With a constant V<sub>BAT</sub>, this appears as a constant output resistance.

The “droop” caused by the output resistance when a load is applied allows the regulator to respond smoothly to load transients with no undershoot from the load line. This can be seen in Figure 31 and Figure 40.

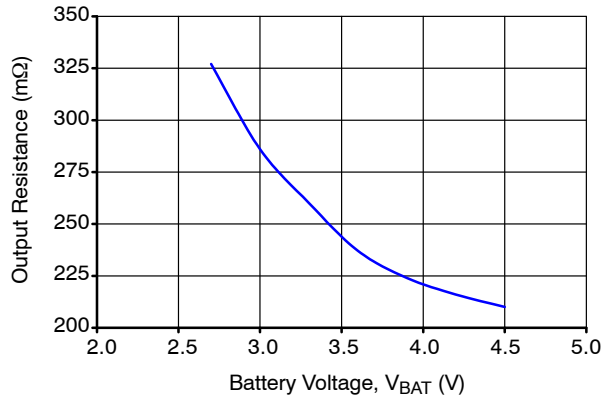

**Figure 40. Output Resistance (R<sub>OUT</sub>)**

V<sub>BUS</sub> as a function of I<sub>LOAD</sub> can be computed when the regulator is in PWM Mode (continuous conduction) as:

$$V_{OUT} = 5.07 - R_{OUT} \cdot I_{LOAD} \quad (\text{eq. 1})$$

At V<sub>BAT</sub> = 3.3 V, and I<sub>LOAD</sub> = 200 mA, V<sub>BUS</sub> would drop to:

$$V_{OUT} = 5.07 - 0.26 \cdot 0.2 = 5.018 \text{ V} \quad (\text{eq. 2})$$

At V<sub>BAT</sub> = 2.7 V, and I<sub>LOAD</sub> = 200 mA, V<sub>BUS</sub> would drop to:

$$V_{OUT} = 5.07 - 0.327 \cdot 0.2 = 5.005 \text{ V} \quad (\text{eq. 3})$$

### PFM Mode

If V<sub>BUS</sub> > V<sub>REFBOOST</sub> (nominally 5.07 V) when the minimum off–time has ended, the regulator enters PFM Mode. Boost pulses are inhibited until V<sub>BUS</sub> < V<sub>REFBOOST</sub>. The minimum on–time is increased to enable the output to pump up sufficiently with each PFM boost pulse. Therefore the regulator behaves like a constant on–time regulator, with the bottom of its output voltage ripple at 5.07 V in PFM Mode.

**Table 17. Boost PWM Operating States**

| Mode | Description          | Invoked When                                            |
|------|----------------------|---------------------------------------------------------|
| LIN  | Linear Startup       | V <sub>BAT</sub> > V <sub>BUS</sub>                     |
| SS   | Boost Soft–Start     | V <sub>BUS</sub> < V <sub>BST</sub>                     |
| BST  | Boost Operating Mode | V <sub>BAT</sub> > UVLO <sub>BST</sub> and SS Completed |

### Startup

When the boost regulator is shut down, current flow is prevented from V<sub>BAT</sub> to V<sub>BUS</sub>, as well as reverse flow from V<sub>BUS</sub> to V<sub>BAT</sub>.

### LIN State

When EN rises, if V<sub>BAT</sub> > UVLO<sub>BST</sub>, the regulator first attempts to bring PMID within 400 mV of V<sub>BAT</sub> using an internal 450 mA current source from V<sub>BAT</sub> (LIN State). If PMID has not achieved V<sub>BAT</sub> – 400 mV after 560 μs, a FAULT state is initiated.

### SS State

When PMID > V<sub>BAT</sub> – 400 mV, the boost regulator begins switching with a reduced peak current limit of about 50% of its normal current limit. The output slews up until V<sub>BUS</sub> is within 5% of its setpoint; at which time, the regulation loop is closed and the current limit is set to 100%.

If the output fails to achieve 95% of its setpoint (V<sub>BST</sub>) within 128 μs, the current limit is increased to 100%. If the output fails to achieve 95% of its setpoint after this second 384 μs period, a fault state is initiated.

### BST State

This is the normal operating mode of the regulator. The regulator uses a minimum t<sub>OFF</sub> – minimum t<sub>ON</sub> modulation scheme. The minimum t<sub>OFF</sub> is proportional to V<sub>IN</sub> / V<sub>OUT</sub>, which keeps the regulator’s switching frequency reasonably constant in CCM. t<sub>ON(MIN)</sub> is proportional to V<sub>BAT</sub> and is a higher value if the inductor current reached 0 before t<sub>OFF(MIN)</sub> in the prior cycle.

To ensure the V<sub>BUS</sub> does not pump significantly above the regulation point, the boost switch remains off as long as FB > V<sub>REF</sub>.


### Boost Faults

If a BOOST fault occurs:

1. The STAT pin pulses.
2. OPA\_MODE bit is reset.
3. The power stage is in High–Impedance Mode.
4. The FAULT bits (REG0[2:0]) are set per Table 18.

### Restart After Boost Faults

If boost was enabled with the OPA\_MODE bit and OTG\_EN = 0, Boost Mode can only be enabled through subsequent I<sup>2</sup>C commands since OPA\_MODE is reset on boost faults. If OTG\_EN = 1 and the OTG pin is still ACTIVE (see Table 16), the boost restarts after a 5.2 ms delay, as shown in Figure 41. If the fault condition persists, restart is attempted every 5 ms until the fault clears or an I<sup>2</sup>C command disables the boost.

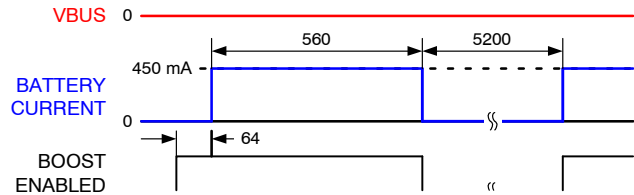

**Figure 41. Boost Response Attempting to Start into V<sub>BUS</sub> Short Circuit (Times in μs)**

**Table 18. FAULT BITS DURING BOOST MODE**

| Fault Bit |    |    | Fault Description                                                                                                                                               |
|-----------|----|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| B2        | B1 | B0 |                                                                                                                                                                 |
| 0         | 0  | 0  | Normal (no fault)                                                                                                                                               |
| 0         | 0  | 1  | V <sub>BUS</sub> > V <sub>BUSOV</sub> P                                                                                                                         |
| 0         | 1  | 0  | V <sub>BUS</sub> fails to achieve the voltage required to advance to the next state during soft-start or sustained (>50 μs) current limit during the BST state. |
| 0         | 1  | 1  | V <sub>BAT</sub> < UVLO <sub>BST</sub>                                                                                                                          |
| 1         | 0  | 0  | N/A: This code does not appear.                                                                                                                                 |
| 1         | 0  | 1  | Thermal shutdown                                                                                                                                                |
| 1         | 1  | 0  | Timer fault; all registers reset.                                                                                                                               |
| 1         | 1  | 1  | N/A: This code does not appear.                                                                                                                                 |

### VREG Pin

The 1.8 V regulated output on this pin can be disabled through I<sup>2</sup>C by setting the DIS\_VREG bit (REG5[6]). VREG can supply up to 2 mA. This circuit, which is powered from PMID, is enabled only when PMID > V<sub>BAT</sub> and does not drain current from the battery. During boost, V<sub>REG</sub> is off. It is also off when the HZ\_MODE bit (REG1[1]) = 1.

### Monitor Register (Reg10H)

Additional status monitoring bits enable the host processor to have more visibility into the status of the IC. The monitor bits are real-time status indicators and are not internally debounced or otherwise time qualified.

The state of the MONITOR register bits listed in High-Impedance Mode is only valid when V<sub>BUS</sub> is valid.

**Table 19. MONITOR REGISTER BIT DEFINITIONS**

| BIT#                | NAME       | STATE                                                    |                                                              | Active When          |
|---------------------|------------|----------------------------------------------------------|--------------------------------------------------------------|----------------------|
|                     |            | 0                                                        | 1                                                            |                      |
| MONITOR Address 10H |            |                                                          |                                                              |                      |
| 7                   | ITERM_CMP  | $V_{CSIN} - V_{BAT} < V_{ITERM}$                         | $V_{CSIN} - V_{BAT} > V_{ITERM}$                             | Charging with TE = 1 |
|                     |            | $V_{CSIN} - V_{BAT} < 1\text{ mV}$                       | $V_{CSIN} - V_{BAT} > 1\text{ mV}$                           | Charging with TE = 0 |
| 6                   | VBAT_CMP   | $V_{BAT} < V_{SHORT}$                                    | $V_{BAT} > V_{SHORT}$                                        | Charging             |
|                     |            | $V_{BAT} < V_{LOWV}$                                     | $V_{BAT} > V_{LOWV}$                                         | High-Impedance Mode  |
|                     |            | $V_{BAT} < UVLO_{BST}$                                   | $V_{BAT} > UVLO_{BST}$                                       | Boosting             |
| 5                   | LINCHG     | Linear Charging Not Enabled                              | Linear Charging Enabled                                      | Charging             |
| 4                   | T_120      | $T_J < 120^{\circ}\text{C}$                              | $T_J > 120^{\circ}\text{C}$                                  |                      |
| 3                   | ICHG       | Charging Current Controlled by $I_{CHARGE}$ Control Loop | Charging Current Not Controlled by $I_{CHARGE}$ Control Loop | Charging             |
| 2                   | IBUS       | $I_{BUS}$ Limiting Charging Current                      | Charge Current Not Limited by $I_{BUS}$                      | Charging             |
| 1                   | VBUS_VALID | $V_{BUS}$ Not Valid                                      | $V_{BUS}$ is Valid                                           | $V_{BUS} > V_{BAT}$  |
| 0                   | CV         | Constant Current Charging                                | Constant Voltage Charging                                    | Charging             |

## I<sup>2</sup>C INTERFACE

The FAN54015's serial interface is compatible with Standard, Fast, Fast Plus, and High-Speed Mode I<sup>2</sup>C-Bus specifications. The SCL line is an input and the SDA line is a bi-directional open-drain output; it can only pull down the bus when active. The SDA line only pulls LOW during data reads and signaling ACK. All data is shifted in MSB (bit 7) first.

### Slave Address


**Table 20. I<sup>2</sup>C SLAVE ADDRESS BYTE**

| Part Type | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0   |
|-----------|---|---|---|---|---|---|---|-----|
| FAN54015  | 1 | 1 | 0 | 1 | 0 | 1 | 0 | R/W |

In hex notation, the slave address assumes a 0 LSB. The hex slave address for the FAN54015 is D4H and is D6H for all other parts in the family.


### Bus Timing

As shown in Figure 42, data is normally transferred when SCL is LOW. Data is clocked in on the rising edge of SCL. Typically, data transitions shortly at or after the falling edge of SCL to allow ample time for the data to set up before the

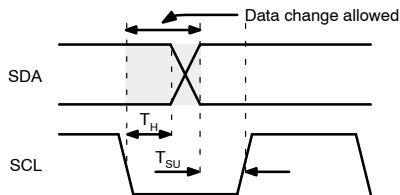


**Figure 42. Data Transfer Timing**

Each bus transaction begins and ends with SDA and SCL HIGH. A transaction begins with a START condition, which is defined as SDA transitioning from 1 to 0 with SCL HIGH, as shown in Figure 43.

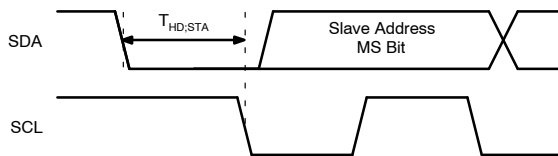

**Figure 43. Start Bit**

A transaction ends with a STOP condition, which is defined as SDA transitioning from 0 to 1 with SCL HIGH, as shown in Figure 44.

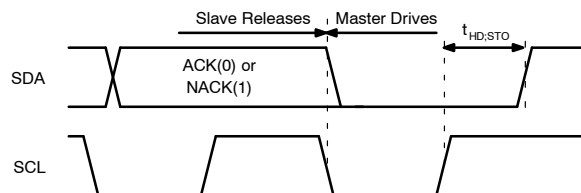

**Figure 44. Stop Bit**


During a read from the FAN54015 (Figure 46, Figure 47), the master issues a Repeated Start after sending the register address and before resending the slave address. The Repeated Start is a 1-to-0 transition on SDA while SCL is HIGH, as shown in Figure 45.

### High-Speed (HS) Mode

The protocols for High-Speed (HS), Low-Speed (LS), and Fast-Speed (FS) Modes are identical except the bus speed for HS Mode is 3.4 MHz. HS Mode is entered when the bus master sends the HS master code 00001XXX after a start condition. The master code is sent in Fast or Fast Plus Mode (less than 1 MHz clock); slaves do not ACK this transmission.

The master then generates a repeated start condition (Figure 45) that causes all slaves on the bus to switch to HS Mode. The master then sends I<sup>2</sup>C packets, as described above, using the HS Mode clock rate and timing.

The bus remains in HS Mode until a stop bit (Figure 44) is sent by the master. While in HS Mode, packets are separated by repeated start conditions (Figure 45).

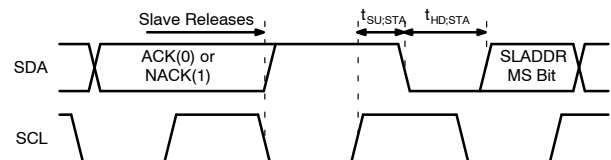

**Figure 45. Repeated Start Timing**

### Read and Write Transactions

The figures below outline the sequences for data read and write. Bus control is signified by the shading of the packet, defined as Master Drives Bus and Slave Drives Bus. All addresses and data are MSB first.

**Table 21. BIT DEFINITIONS FOR FIGURE 46, FIGURE 47, AND FIGURE 48**

| Symbol    | Definition                                                          |
|-----------|---------------------------------------------------------------------|
| S         | START, <i>see</i> Figure 43                                         |
| A         | ACK. The slave drives SDA to 0 to acknowledge the preceding packet. |
| $\bar{A}$ | NACK. The slave sends a 1 to NACK the preceding packet.             |
| R         | Repeated START, <i>see</i> Figure 45                                |
| P         | STOP, <i>see</i> Figure 44. Figure 44                               |

## FAN54015




Figure 46. Write Transaction



Figure 47. Read Transaction

## REGISTER DESCRIPTIONS

The nine FAN54015 user-accessible registers are defined in Table 22.

Table 22. I<sup>2</sup>C REGISTER ADDRESS

| Register   |           | Address Bits |   |   |   |   |   |   |   |
|------------|-----------|--------------|---|---|---|---|---|---|---|
| Name       | REG#      | 7            | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| CONTROL0   | 0         | 0            | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| CONTROL1   | 1         | 0            | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| OREG       | 2         | 0            | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| IC_INFO    | 03 or 3BH | 0            | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| IBAT       | 4         | 0            | 0 | 0 | 0 | 0 | 1 | 0 | 0 |
| SP_CHARGER | 5         | 0            | 0 | 0 | 0 | 0 | 1 | 0 | 1 |
| SAFETY     | 6         | 0            | 0 | 0 | 0 | 0 | 1 | 1 | 0 |
| MONITOR    | 10h       | 0            | 0 | 0 | 1 | 0 | 0 | 0 | 0 |

Table 23. REGISTER BIT DEFINITIONS

(This table defines the operation of each register bit for all IC versions. Default values are in **bold** text.)

| Bit                                                                                                                                    | Name           | Value | Type | Description                                                                                 |
|----------------------------------------------------------------------------------------------------------------------------------------|----------------|-------|------|---------------------------------------------------------------------------------------------|
| <b>CONTROL0</b> <span style="float:right">Register Address: 00</span> <span style="float:right">Default Value = X1XX 0XXX</span>       |                |       |      |                                                                                             |
| 7                                                                                                                                      | TMR_RST<br>OTG | 1     | W    | Writing a 1 resets the t <sub>32S</sub> timer; writing a 0 has no effect                    |
|                                                                                                                                        |                |       | R    | Returns the OTG pin level (1 = HIGH)                                                        |
| 6                                                                                                                                      | EN_STAT        | 0     | R/W  | Prevents STAT pin from going LOW during charging; STAT pin still pulses to enunciate faults |
|                                                                                                                                        |                | 1     |      | <b>Enables STAT pin LOW when IC is charging</b>                                             |
| 5:4                                                                                                                                    | STAT           | 00    | R    | Ready                                                                                       |
|                                                                                                                                        |                | 01    |      | Charge in progress                                                                          |
|                                                                                                                                        |                | 10    |      | Charge done                                                                                 |
|                                                                                                                                        |                | 11    |      | Fault                                                                                       |
| 3                                                                                                                                      | BOOST          | 0     | R    | <b>IC is not in Boost Mode</b>                                                              |
|                                                                                                                                        |                | 1     |      | IC is in Boost Mode                                                                         |
| 2:0                                                                                                                                    | FAULT          |       | R    | Fault status bits: <i>for Charge Mode, see Table 13; for Boost Mode, see Table 18</i>       |
| <b>CONTROL1</b> <span style="float:right">Register Address: 01</span> <span style="float:right">Default Value = 0011 0000 (30h)</span> |                |       |      |                                                                                             |
| 7:6                                                                                                                                    | IINLIM         |       | R/W  | Input current limit, <i>see Table 7</i>                                                     |
| 5:4                                                                                                                                    | VLOWV          | 00    | R/W  | 3.4 V                                                                                       |
|                                                                                                                                        |                | 01    |      | 3.5 V                                                                                       |
|                                                                                                                                        |                | 10    |      | 3.6 V                                                                                       |
|                                                                                                                                        |                | 11    |      | <b>3.7 V</b>                                                                                |
|                                                                                                                                        |                |       |      | Weak battery voltage threshold                                                              |

**Table 23. REGISTER BIT DEFINITIONS**(This table defines the operation of each register bit for all IC versions. Default values are in **bold** text.) (continued)

| Bit        | Name        | Value    | Type | Description                                                                                                                           |                                 |
|------------|-------------|----------|------|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| CONTROL1   |             |          |      | Register Address: 01                                                                                                                  | Default Value = 0011 0000 (30h) |
| 3          | TE          | 0        | R/W  | Disable charge current termination                                                                                                    |                                 |
|            |             | 1        |      | Enable charge current termination                                                                                                     |                                 |
| 2          | CE          | 0        | R/W  | Charger enabled                                                                                                                       |                                 |
|            |             | 1        |      | Charger disabled                                                                                                                      |                                 |
| 1          | HZ_MODE     | 0        | R/W  | Not High-Impedance Mode                                                                                                               | See Table 16                    |
|            |             | 1        |      | High-Impedance Mode                                                                                                                   |                                 |
| 0          | OPA_MODE    | 0        | R/W  | Charge Mode                                                                                                                           |                                 |
|            |             | 1        |      | Boost Mode                                                                                                                            |                                 |
| OREG       |             |          |      | Register Address: 02                                                                                                                  | Default Value = 0000 1010 (0Ah) |
| 7:2        | OREG        |          | R/W  | Charger output “float” voltage; programmable from 3.5 to 4.44V in 20mV increments; defaults to 000010 (3.54 V), see Table 3           |                                 |
| 1          | OTG_PL      | 0        | R/W  | OTG pin active LOW                                                                                                                    |                                 |
|            |             | 1        |      | OTG pin active HIGH                                                                                                                   |                                 |
| 0          | OTG_EN      | 0        | R/W  | Disables OTG pin                                                                                                                      |                                 |
|            |             | 1        |      | Enables OTG pin                                                                                                                       |                                 |
| IC_INFO    |             |          |      | Register Address: 03                                                                                                                  | Default Value = 10010100 (94h)  |
| 7:5        | Vendor Code | 100      | R    | Identifies ON Semiconductor as the IC supplier                                                                                        |                                 |
| 4:2        | PN          |          | R    | Part number bits, see the Ordering Info on page 31                                                                                    |                                 |
| 1:0        | REV         | 00       | R    | IC Revision, revision 1.X, where X is the decimal of these three bits                                                                 |                                 |
| IBAT       |             |          |      | Register Address: 04                                                                                                                  | Default Value = 1000 1001 (89h) |
| 7          | RESET       | 1        | W    | Writing a 1 resets charge parameters, except the Safety register (Reg6), to their defaults: writing a 0 has no effect; read returns 1 |                                 |
| 6:4        | IOCHARGE    | Table 5  | R/W  | Programs the maximum charge current, see Table 5                                                                                      |                                 |
| 3          | Reserved    | 1        | R    | Unused                                                                                                                                |                                 |
| 2:0        | ITERM       | Table 6  | R/W  | Sets the current used for charging termination, see Table 6                                                                           |                                 |
| SP_CHARGER |             |          |      | Register Address: 05                                                                                                                  | Default Value = 001X X100       |
| 7          | Reserved    | 0        | R    | Unused                                                                                                                                |                                 |
| 6          | DIS_VREG    | 0        | R/W  | 1.8 V regulator is ON                                                                                                                 |                                 |
|            |             | 1        |      | 1.8 V regulator is OFF                                                                                                                |                                 |
| 5          | IO_LEVEL    | 0        | R/W  | Output current is controlled by IOCHARGE bits                                                                                         |                                 |
|            |             | 1        |      | Voltage across RSENSE for output current control is set to 34 mV (500 mA for RSENSE = 68 mΩ and 340 mA for 100 mΩ)                    |                                 |
| 4          | SP          | 0        | R    | Special charger is not active (VBUS is able to stay above VSP)                                                                        |                                 |
|            |             | 1        |      | Special charger has been detected and VBUS is being regulated to VSP                                                                  |                                 |
| 3          | EN_LEVEL    | 0        | R    | DISABLE pin is LOW                                                                                                                    |                                 |
|            |             | 1        |      | DISABLE pin is HIGH                                                                                                                   |                                 |
| 2:0        | VSP         | Table 8  | R/W  | Special charger input regulation voltage, see Table 8                                                                                 |                                 |
| SAFETY     |             |          |      | Register Address: 06                                                                                                                  | Default Value = 0100 0000 (40h) |
| 7          | Reserved    | 0        | R    | Bit disabled and always returns 0 when read back                                                                                      |                                 |
| 6:4        | ISAFE       | Table 9  | R/W  | Sets the maximum IOCHARGE value used by the control circuit, see Table 9                                                              |                                 |
| 3:0        | VSAFE       | Table 10 | R/W  | Sets the maximum VOREG used by the control circuit, see Table 10                                                                      |                                 |


**Table 23. REGISTER BIT DEFINITIONS**(This table defines the operation of each register bit for all IC versions. Default values are in **bold text**.) (continued)

| Bit            | Name       | Value        | Type | Description                                                                                                          |
|----------------|------------|--------------|------|----------------------------------------------------------------------------------------------------------------------|
| <b>MONITOR</b> |            |              |      | <b>Register Address: 10h (16)</b> <i>See Table 19</i>                                                                |
| 7              | ITERM_CMP  | See Table 19 | R    | ITERM comparator output, 1 when VRSENSE > ITERM reference                                                            |
| 6              | VBAT_CMP   |              | R    | Output of VBAT comparator                                                                                            |
| 5              | LINCHG     |              | R    | 30 mA linear charger ON                                                                                              |
| 4              | T_120      |              | R    | Thermal regulation comparator; when = 1 and T_145 = 0, the charge current is limited to 22.1 mV across RSENSE        |
| 3              | ICHG       |              | R    | 0 indicates the ICHARGE loop is controlling the battery charge current                                               |
| 2              | IBUS       |              | R    | 0 indicates the IBUS (input current) loop is controlling the battery charge current                                  |
| 1              | VBUS_VALID |              | R    | 1 indicates VBUS has passed validation and is capable of charging                                                    |
| 0              | CV         |              | R    | 1 indicates the constant-voltage loop (OREG) is controlling the charger and all current limiting loops have released |

**PCB LAYOUT RECOMMENDATIONS**

Bypass capacitors should be placed as close to the IC as possible. In particular, the total loop length for CMID should be minimized to reduce overshoot and ringing on the SW,

PMID, and VBUS pins. All power and ground pins must be routed to their bypass capacitors, using top copper whenever possible. Copper area connecting to the IC should be maximized to improve thermal performance if possible.

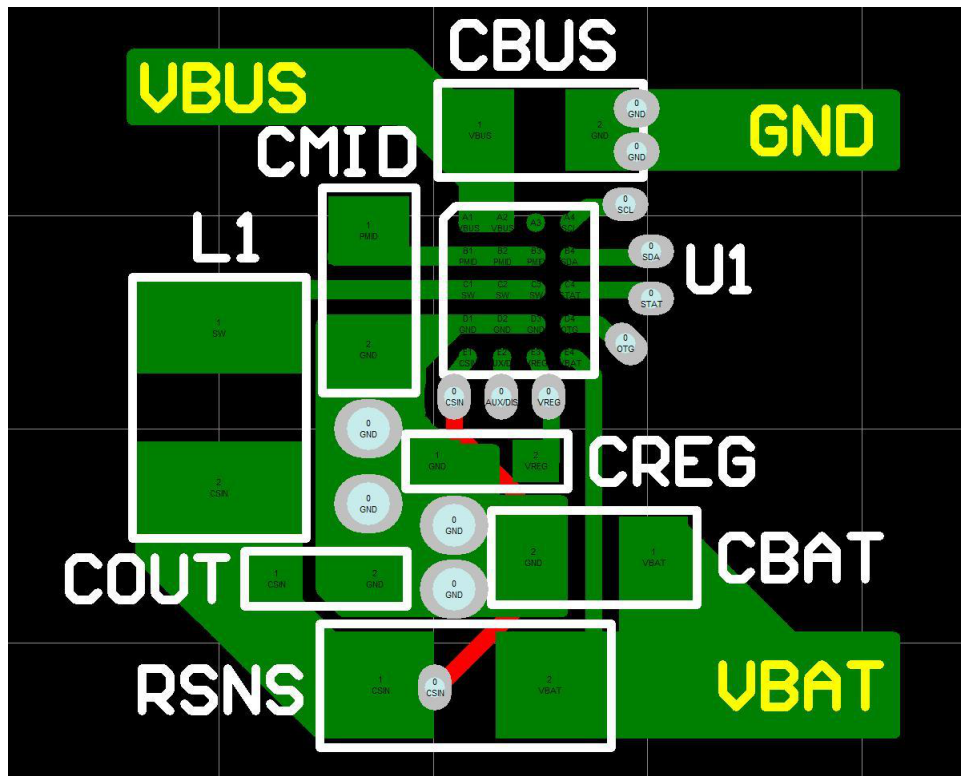**Figure 48. PCB Layout Recommendations**

## FAN54015

### ORDERING INFORMATION

| Part Number           | Temperature Range | Package                                                                                                 | PN Bits:<br>IC_INFO[4:2] | Shipping <sup>†</sup> |
|-----------------------|-------------------|---------------------------------------------------------------------------------------------------------|--------------------------|-----------------------|
| FAN54015UCX           | -40 to 85°C       | 20-Bump, Wafer-Level Chip-Scale Package (WLCSP), 0.4 mm Pitch, Estimated Size: 1.96 x 1.87 mm (Pb-Free) | 101                      | 3000 / Tape & Reel    |
| FAN54015BUCX (Note 8) |                   |                                                                                                         |                          | 3000 / Tape & Reel    |





<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

8. FAN54015BUCX includes backside lamination.

### WLCSP20 1.96x1.87x0.586

CASE 567SL  
ISSUE O

DATE 30 NOV 2016

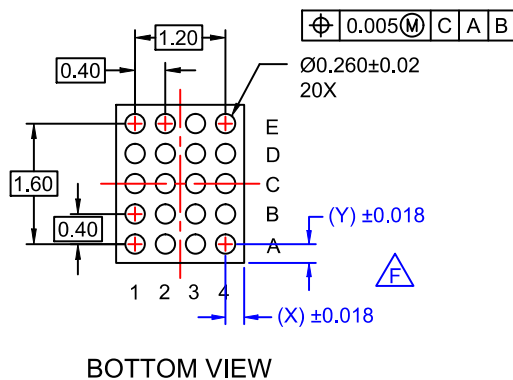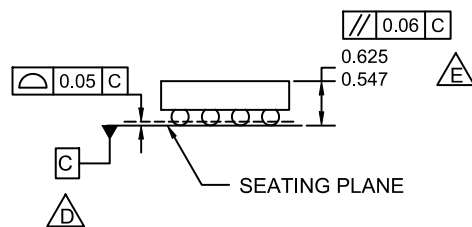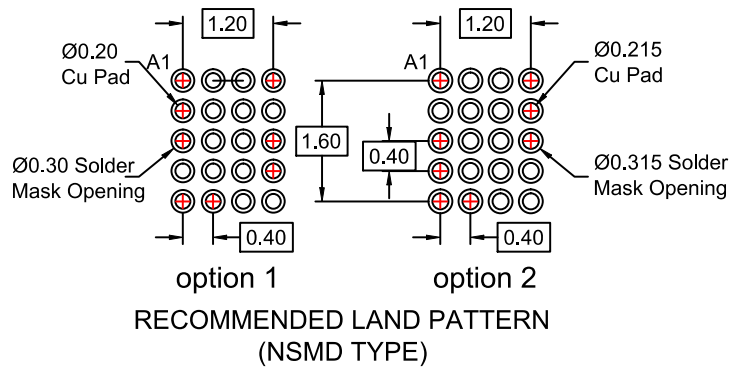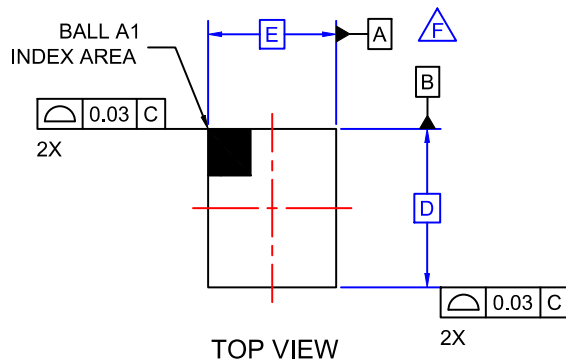

### NOTES:

- A. NO JEDEC REGISTRATION APPLIES.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCE PER ASMEY14.5M, 2009.
- D. DATUM C IS DEFINED BY THE SPHERICAL CROWNS OF THE BALLS.
- E. PACKAGE NOMINAL HEIGHT IS 586 MICRONS ±39 MICRONS (547-625 MICRONS).
- F. FOR DIMENSIONS D, E, X, AND Y SEE PRODUCT DATASHEET.

|                  |                         |                                                                                                                                                                                  |
|------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98AON16608G             | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | WLCSP20 1.96x1.87x0.586 | PAGE 1 OF 1                                                                                                                                                                      |

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)