
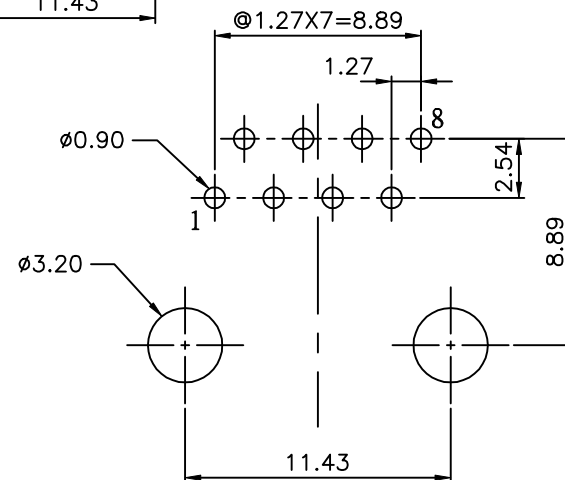
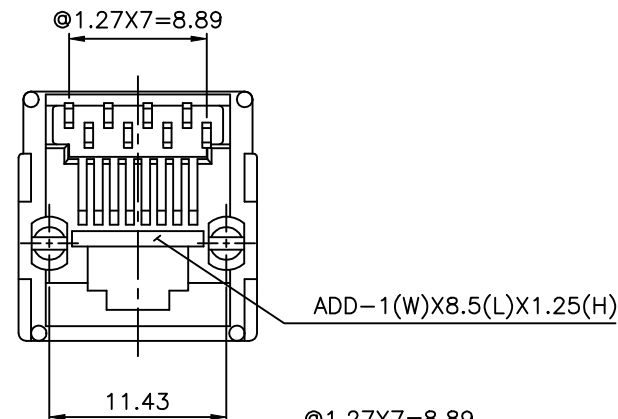


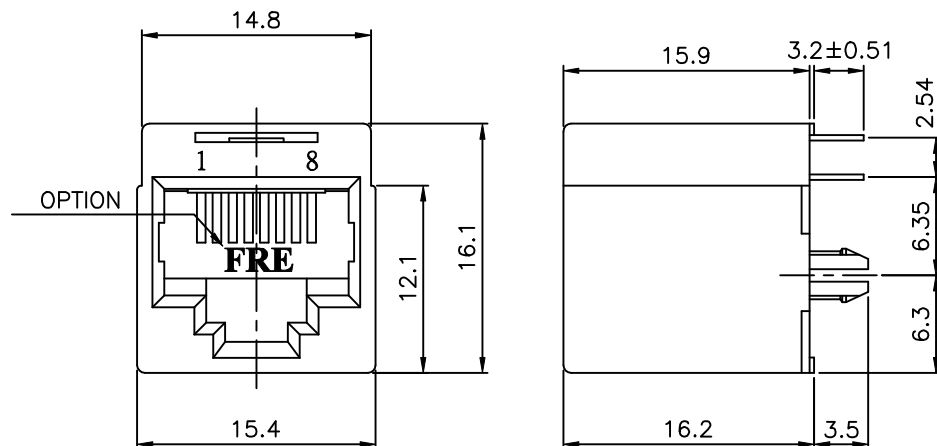

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- | | | |
|------------------------------|---|---------------------------------|
| 1. HOUSING MATERIAL | : | GLASS FILLED POLYESTER UL94V-0. |
| 2. CONTACT MATERIAL | : | PHOSPHOR BRONZE t=0.35mm. |
| 3. PLATING | : | GOLD PLATING OVER NICKEL. |
| 4. OPERATING LIFE | : | 750 CYCLES MIN. |
| 5. PCB RETENTION PRE-SOLDER | : | 1 LB MIN. |
| 6. PCB RETENTION POST-SOLDER | : | 10 LBS MIN. |

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
3. WAVE SOLDER TEMPERATURE: 230-250°C.(3~5 SECOND)

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E528X-X00X4X-L

8---8P8C
6---8P6C
4---8P4C
2---8P2C
3-W/ FRE LOGO
R-W/O FRE LOGO

1- 3u" 2- 6u"
3-15u" 4-30u"
5-50u"
0--A06-0100
1--A06-0080

DETACHED LISTS			DFTO ANKUE		DATE 4/18/2005	
	TOLERANCES EXCEPT AS NOTED		CHKDQIANPU		DATE2005/4/19	
			MFO		DATE	
			APPVILUSHENG		DATE2005/4/19	
			MATERIAL :			
			QT'Y :			
			FINISH :			
			SCALE : 3:1			
			THIRD ANGLE PROJECTION			

FULL RISE ELECTRONIC CO., LTD			
TITLE			
RJ45 TOP ENTRY PCB MODULAR JACK(DIP TYPE)			
DRAWING NO. GE523045-LC			SIZE
/PART NO. SEE NOTE			A3
DO NOT SCALE DRAWING			SHEET OF