

Ratings

Voltage: 30 Vdc
Current: 300 mA

Operating Temperature Range

-25° to 85°C, relative humidity of 85% or less

Materials

1. Insulator: nylon, black
2. Insulator: nylon, black
3. Shell: brass, nickel-plated
4. Spring contact: phosphor bronze, nickel-plated
5. Spring contact: phosphor bronze, nickel-plated
6. Spring contact: phosphor bronze
7. Spring contact: phosphor bronze, nickel-plated
8. Solder tab: brass, nickel-plated
9. Nut: brass, nickel-plated, P/N 56-00004, M9x 0.75
10. Split washer: cold rolled steel, nickel-plated, P/N 56-00005

Electrical Requirements

Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 50 mΩ or less

Mechanical Requirements




Insertion force: 0.3-2 kgf
Withdrawal force: 0.3-2 kgf
Terminal strength: a static load of 300 gf shall be applied to the terminal for 15 seconds in any direction.
Life cycle: 5000 mating cycles while maintaining less than 100 mΩ contact resistance, 50MΩ insulation resistance, and 500 Vac for 1 minute withstand voltage.

Soldering


Solderability: 75% minimum coverage when terminals dipped 2mm in 235 ±5 °C solder bath for 3 ±0.5 seconds
Solder bath durability: no deformation when immersed in 255 ±5 °C up to surface of the board 1.6 mm for 5 seconds or less
Solder iron durability: no deformation when exposed to 350 ±10 °C for 3 ±0.5 seconds

Environmental Requirements

Cold test: -25 ±3 °C for 48 hours without deformation
Heat test: 85 ±2 °C, relative humidity 45-85% for 48 hours without deformation
Humidity test: 40 ±2 °C, relative humidity 90-98% for 48 hours without deformation

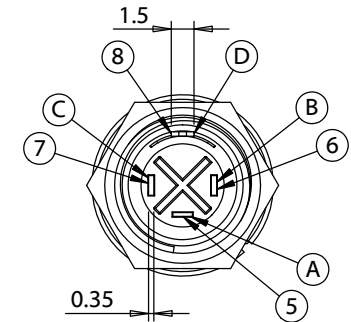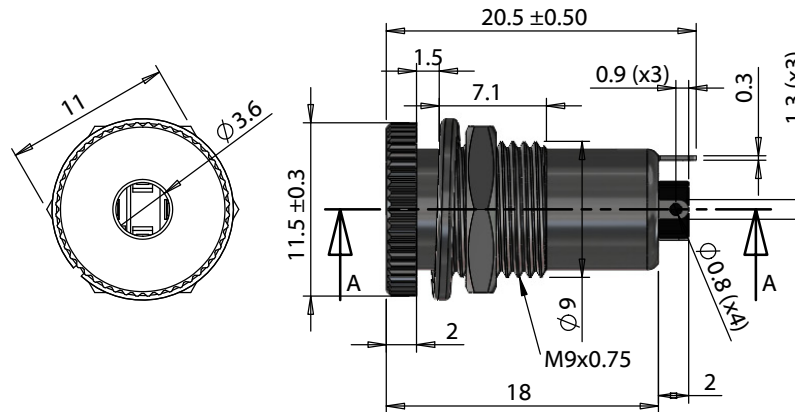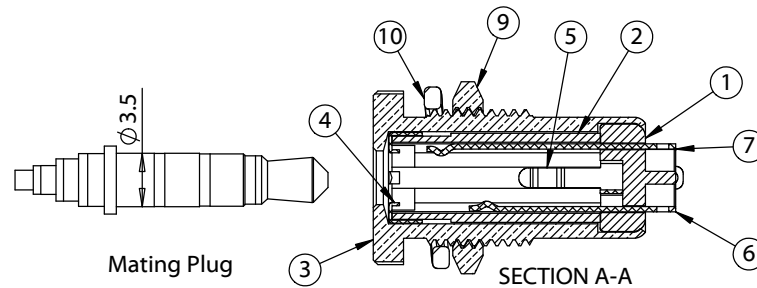


Install from outside of the panel,
attach nut and tighten from within.



Installation Details

Panel thickness: 1.0 - 4.8 mm
Panel cutout Ø: 9.2 - 10.5 mm

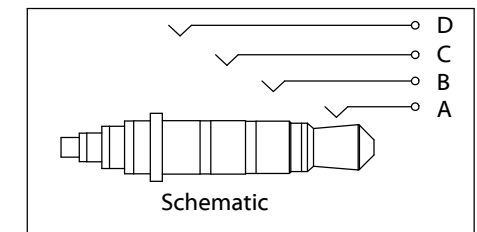

Revision:	Date:	Description:	Prepared: CR Digitally signed by CR Date: 2026.06.02 13:50:19 -07'00'	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	8/08/2017	Initial release	Verified: KW Digitally signed by KW Date: 2026.07.24 16:46:51 -07'00'	RoHS compliant	
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent	
			Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm	Description: Connector, audio jack, 4C, 3.5xL20.5 mm, panel mount, nickel plated, threaded, nut and washer	
				Size: A	Part number: 54-00082
				Scale: 2:1	Sheet 1 of 1