

PD-91273G

Radiation Hardened Power MOSFET
Thru-Hole (TO-257AA)
200V, 9.4A, N-channel, Rad Hard HEXFET™ Technology

Features

- Single event effect (SEE) hardened
- Low R_{DS(on)}
- Low total gate charge
- Simple drive requirements
- · Hermetically sealed
- Electrically isolated
- · Ceramic eyelets
- ESD rating: Class 1C per MIL-STD-750, Method 1020

Potential Applications

- DC-DC converter
- Motor drives

Product Validation

Qualified to JANS screening flow according to MIL-PRF-19500 for space applications

Description

IR HiRel rad hard HEXFET technology provides high performance power MOSFETs for space applications. This technology has over a decade of proven performance and reliability in satellite applications. These devices have been characterized for both Total Dose and Single Event Effects (SEE). The combination of low R_{DS(on)} and low gate charge reduces the power losses in switching applications such as DC to DC converters and motor control. These devices retain all of the well-established advantages of MOSFETs such as voltage control, fast switching and temperature stability of electrical parameters.

Ordering Information

Table 1 Ordering options

able 1 Ordering options							
Part number	Package	Screening Level	TID Level				
IRHY7230CM	TO-257AA	сотѕ	100 krad(Si)				
JANSR2N7381	TO-257AA	JANS	100 krad(Si)				
IRHY3230CM	TO-257AA	сотѕ	300 krad(Si)				
JANSF2N7381	TO-257AA	JANS	300 krad(Si)				
IRHY4230CM	TO-257AA	сотѕ	500 krad(Si)				
JANSG2N7381	TO-257AA	JANS	500 krad(Si)				

Product Summary

BV_{DSS}: 200V

• Ip: 9.4A

• $R_{DS(on),max}$: 0.40Ω

• **Q**_{G,max}: 50nC

REF: MIL-PRF-19500/614








Table of contents

Table of contents

Featı	ures	1
Pote	ntial Applications	1
Prod	uct Validation	1
Desci	ription	1
	ring Information	
	e of contents	
1	Absolute Maximum Ratings	
2	Device Characteristics	
2.1	Electrical Characteristics (Pre-Irradiation)	
2.2	Source-Drain Diode Ratings and Characteristics (Pre-Irradiation)	
2.3	Thermal Characteristics	
2.4	Radiation Characteristics	5
2.4.1	Electrical Characteristics — Post Total Dose Irradiation	5
2.4.2	Single Event Effects — Safe Operating Area	6
3	Electrical Characteristics Curves (Pre-irradiation)	7
4	Test Circuits (Pre-irradiation)	.10
5	Package Outline	.11
Revis	sion history	

Radiation Hardened Power MOSFET Thru-Hole (TO-257AA)



Absolute Maximum Ratings

Absolute Maximum Ratings 1

Absolute Maximum Ratings (Pre-Irradiation) Table 2

Symbol	Parameter	Value	Unit
I_{D1} @ V_{GS} = 12V, T_{C} = 25°C	Continuous Drain Current	9.4	Α
I_{D2} @ V_{GS} = 12V, T_{C} = 100°C	Continuous Drain Current	6.0	Α
I_{DM} @ $T_C = 25$ °C	Pulsed Drain Current ¹	37.6	Α
$P_D @ T_C = 25^{\circ}C$	Maximum Power Dissipation	75	W
	Linear Derating Factor	0.6	W/°C
V_{GS}	Gate-to-Source Voltage	± 20	٧
E _{AS}	Single Pulse Avalanche Energy ²	150	mJ
I_{AR}	Avalanche Current ¹	9.4	Α
E _{AR}	Repetitive Avalanche Energy ¹	7.5	mJ
dv/dt	Peak Diode Reverse Recovery ³	16	V/ns
T _J Operating Junction and		-55 to +150	
T _{STG} Storage Temperature Range		33 to 130	°C
	Lead Temperature	300 (0.063 in. /1.6 mm from case for 10s)	
	Weight	7.0 (Typical)	g

¹ Repetitive Rating; Pulse width limited by maximum junction temperature.

 $^{^2}$ V_{DD} = 50V, starting T_J = 25°C, L = 3.4mH, Peak I_L = 9.4A, V_{GS} = 12V

 $^{^3}$ I_{SD} ≤ 9.4 A, di/dt ≤ 660 A/ $\mu s,\,V_{DD}$ ≤ 200 V, T_J ≤ 150 °C



Device Characteristics

2 Device Characteristics

2.1 Electrical Characteristics (Pre-Irradiation)

Table 3 Static and Dynamic Electrical Characteristics @ T_j = 25°C (Unless Otherwise Specified)

Symbol	Parameter	Min.	Тур.	Мах.	Unit	Test Conditions	
BV _{DSS}	Drain-to-Source Breakdown Voltage	200	ı	_	V	V _{GS} = 0V, I _D = 1.0mA	
$\Delta BV_{DSS}/\Delta T_{J}$	Breakdown Voltage Temp. Coefficient	_	0.23	_	V/°C	Reference to 25°C, I _D = 1.0mA	
D	Static Drain-to-Source On-State	_	_	0.40	Ω	$V_{GS} = 12V$, $I_{D2} = 6.0A^{1}$	
R _{DS(on)}	Resistance	_	_	0.49	22	$V_{GS} = 12V$, $I_{D1} = 9.4A^{1}$	
$V_{\text{GS(th)}}$	Gate Threshold Voltage	2.0		4.0	V	$V_{DS} = V_{GS}$, $I_D = 1mA$	
Gfs	Forward Transconductance	2.5	_	_	S	$V_{DS} = 15V$, $I_{D2} = 6.0A^{1}$	
1	Zawa Cata Valtaga Brain Current	_	ı	25		$V_{DS} = 160V, V_{GS} = 0V$	
I_{DSS}	Zero Gate Voltage Drain Current	_	1	250	μΑ	$V_{DS} = 160V, V_{GS} = 0V, T_{J} = 125^{\circ}C$	
	Gate-to-Source Leakage Forward	_	_	100	^	V _{GS} = 20V	
I_{GSS}	Gate-to-Source Leakage Reverse	_	_	-100	nA	V _{GS} = -20V	
$\overline{Q_G}$	Total Gate Charge	_	_	50		I _{D1} = 9.4A	
Q_{GS}	Gate-to-Source Charge	_	_	10	nC	V _{DS} = 100V	
$\overline{Q_{GD}}$	Gate-to-Drain ('Miller') Charge	_	_	25		$V_{GS} = 12V$	
t _{d(on)}	Turn-On Delay Time	_	_	25		I _{D1} = 9.4A **	
$\overline{t_r}$	Rise Time	_		50		$V_{DD} = 100V$	
t _{d(off)}	Turn-Off Delay Time	_		70	ns	$R_G = 7.5\Omega$	
t _f	Fall Time	_		60		$V_{GS} = 12V$	
$L_s + L_D$	Total Inductance	_	7.0	_	nH	Measured from Drain lead (6mm / 0.25 in from package) to Source lead (6mm/ 0.25 in from package) with Source wire internally bonded from Source pin to Drain pad	
C _{iss}	Input Capacitance		1200	_		$V_{GS} = 0V$	
C _{oss}	Output Capacitance	_	250	_	pF	$V_{DS} = 25V$	
C _{rss}	Reverse Transfer Capacitance	_	63	_		f = 1.0 MHz	

^{**} Switching speed maximum limits are based on manufacturing test equipment and capability.

 $^{^{1}}$ Pulse width \leq 300 $\mu s;$ Duty Cycle \leq 2%



Device Characteristics

2.2 Source-Drain Diode Ratings and Characteristics (Pre-Irradiation)

Table 4 Source-Drain Diode Characteristics

Symbol	Parameter	Min.	Тур.	Max.	Unit	Test Conditions	
Is	Continuous Source Current (Body Diode)		_	9.4	Α		
I _{SM}	Pulsed Source Current (Body Diode) ¹	_	_	37.6	Α		
V_{SD}	Diode Forward Voltage	_	_	1.4	٧	$T_J = 25$ °C, $I_S = 9.4A$, $V_{GS} = 0V^2$	
t _{rr}	Reverse Recovery Time	_	_	460	ns	$T_J = 25$ °C, $I_F = 9.4A$, $V_{DD} \le 50V$	
Q _{rr}	Reverse Recovery Charge	_	2.4	_	μC	di/dt = 100A/μs ²	
t _{on}	Forward Turn-On Time	Intrinsic turn-on time is negligible (turn-on is dominated by L _S +L _D)					

2.3 Thermal Characteristics

Table 5 Thermal Resistance

Symbol	Parameter	Min.	Тур.	Max.	Unit
$R_{\theta JC}$	Junction-to-Case	-	_	1.67	°C/M
$R_{\theta JA}$	Junction-to- Ambient (Typical socket mount)	_	_	80	°C/W

2.4 Radiation Characteristics

IR HiRel radiation hardened MOSFETs are tested to verify their radiation hardness capability. The hardness assurance program at IR HiRel is comprised of two radiation environments. Every manufacturing lot is tested for total ionizing dose (per notes 3 and 4) using the TO-3 package. Both pre- and post-irradiation performance are tested and specified using the same drive circuitry and test conditions in order to provide a direct comparison.

2.4.1 Electrical Characteristics — Post Total Dose Irradiation

Table 6 Electrical Characteristics @ T_J = 25°C, Post Total Dose Irradiation ^{3, 4}

Symbol	Parameter	100 krad (Si) ⁵		Up to 500 krad (Si) ⁶		Unit	Test Conditions	
		Min.	Max.	Min.	Max.			
BV _{DSS}	Drain-to-Source Breakdown Voltage	200	_	200	_	٧	$V_{GS} = 0V, I_{D} = 1.0 \text{mA}$	
$V_{GS(th)}$	Gate Threshold Voltage	2.0	4.0	1.25	4.5	V	$V_{DS} = V_{GS}, I_{D} = 1.0 \text{mA}$	
I _{GSS}	Gate-to-Source Leakage Forward	_	100	_	100	A	V _{GS} = 20V	
	Gate-to-Source Leakage Reverse	_	-100	_	-100	nA	V _{GS} = -20V	
I _{DSS}	Zero Gate Voltage Drain Current	_	25	_	25	μΑ	$V_{DS} = 160V, V_{GS} = 0V$	
R _{DS(on)}	Static Drain-to-Source On-State Resistance (TO-3) ²	_	0.40	_	0.53	Ω	$V_{GS} = 12V, I_{D2} = 6.0A$	
R _{DS(on)}	Static Drain-to-Source On-State Resistance (TO-257AA) ²	_	0.40	_	0.53	Ω	$V_{GS} = 12V, I_{D2} = 6.0A$	
V_{SD}	Diode Forward Voltage	_	1.4	_	1.4	V	$V_{GS} = 0V, I_F = 9.4A$	

¹ Repetitive Rating; Pulse width limited by maximum junction temperature.

 $^{^2}$ Pulse width \leq 300 $\mu s;$ Duty Cycle \leq 2%

³ Total Dose Irradiation with V_{GS} Bias. V_{GS} = 12V applied and V_{DS} = 0 during irradiation per MIL-STD-750, Method 1019, condition A.

 $^{^4}$ Total Dose Irradiation with V_{DS} Bias. V_{DS} = 160V applied and V_{GS} = 0 during irradiation per MIL-STD-750, Method 1019, condition A.

⁵ Part numbers IRHY7230CM (JANSR2N7381)

⁶ Part numbers IRHY3230CM (JANSF2N7381) and IRHY4230CM (JANSG2N7381)



Device Characteristics

2.4.2 Single Event Effects — Safe Operating Area

IR HiRel radiation hardened MOSFETs have been characterized in heavy ion environment for Single Event Effects (SEE). Single Event Effects characterization is illustrated in Fig. 1 and Table 7.

Table 7 Typical Single Event Effects Safe Operating Area

lon	LET	Energy Range				V _{DS} (V)		
lon	(MeV·cm²/mg)	(MeV)	(μm)	$V_{GS} = 0V$	V _{GS} = -5V	V _{GS} = -10V	V _{GS} = -15V	V _{GS} = -20V
Cu	28	285	43	190	180	170	125	_
Br	36.8	305	39	100	100	100	50	_

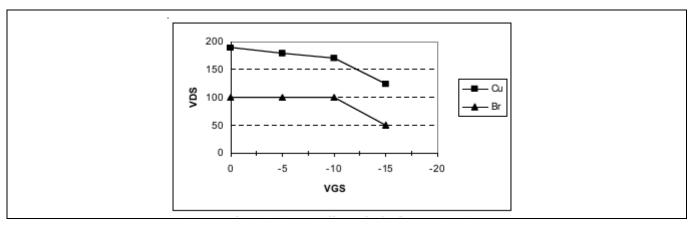


Figure 1 Typical Single Event Effect, Safe Operating Area



Electrical Characteristics Curves (Pre-irradiation)

3 Electrical Characteristics Curves (Pre-irradiation)

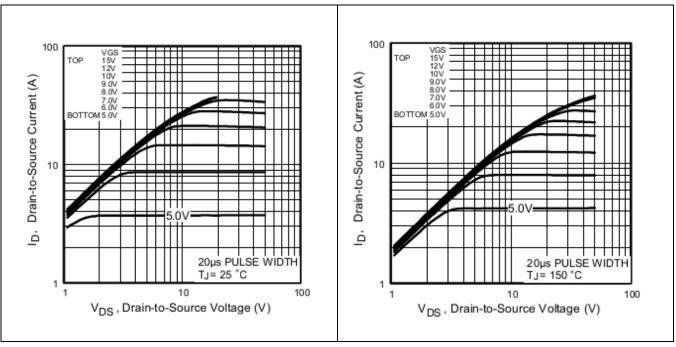


Figure 2 Typical Output Characteristics

Figure 3 Typical Output Characteristics

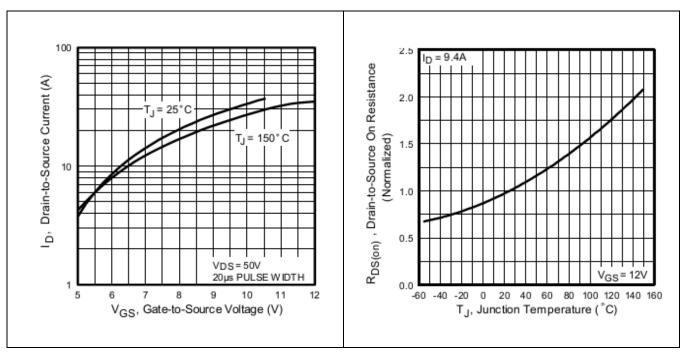


Figure 4 Typical Transfer Characteristics

Figure 5 Normalized On-Resistance Vs.
Temperature



Electrical Characteristics Curves (Pre-irradiation)

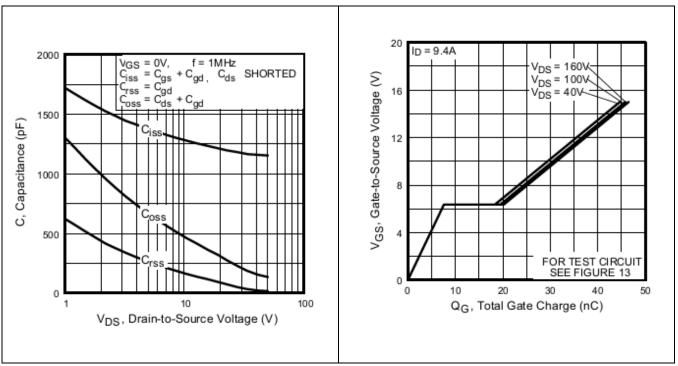


Figure 6 Typical Capacitance Vs.

Drain-to-Source Voltage

Figure 7 Typical Gate-to-Source Voltage Vs.
Typical Gate Charge

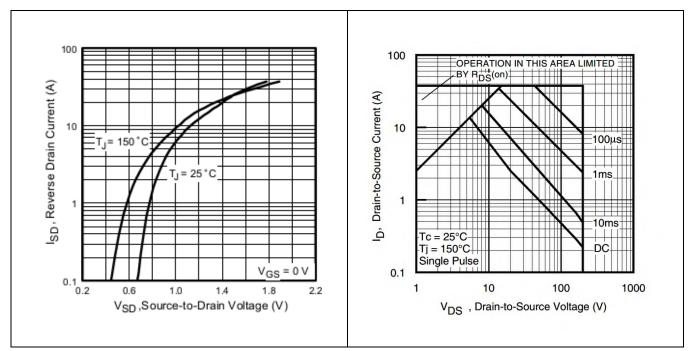


Figure 8 Typical Source-Drain Current Vs.
Diode Forward Voltage

Figure 9 Maximum Safe Operating Area



Electrical Characteristics Curves (Pre-irradiation)

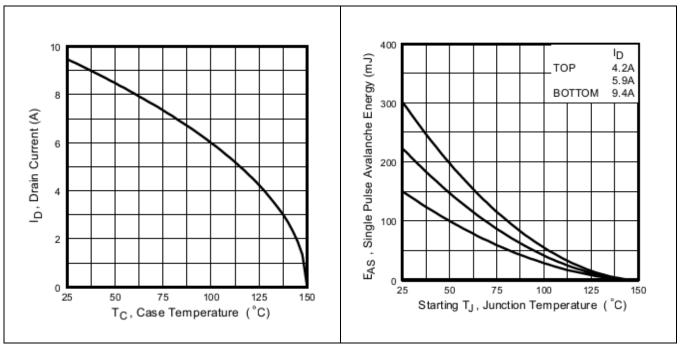


Figure 10 Maximum Drain Current Vs.Case Temperature

Figure 11 Maximum Avalanche Energy Vs.
Junction Temperature

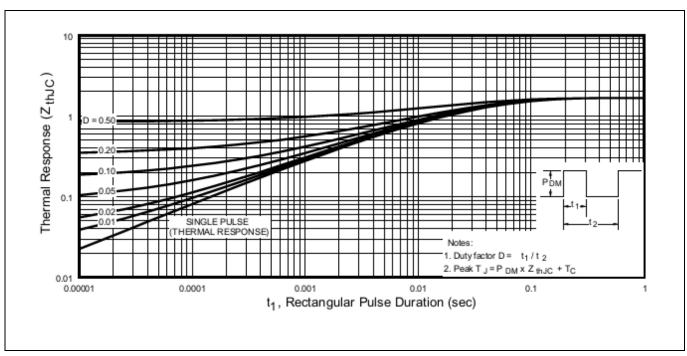


Figure 12 Maximum Effective Transient Thermal Impedance, Junction-to-Case



Test Circuits (Pre-irradiation)

4 Test Circuits (Pre-irradiation)

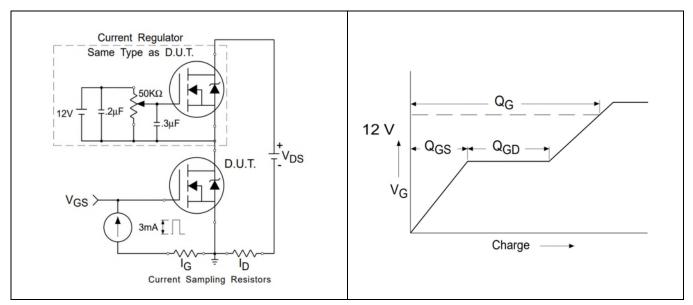


Figure 13 Gate Charge Test Circuit

Figure 14 Gate Charge Waveform

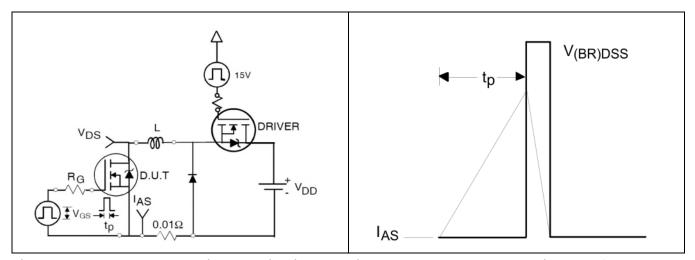


Figure 15 Unclamped Inductive Test Circuit

Figure 16 Unclamped Inductive Waveform

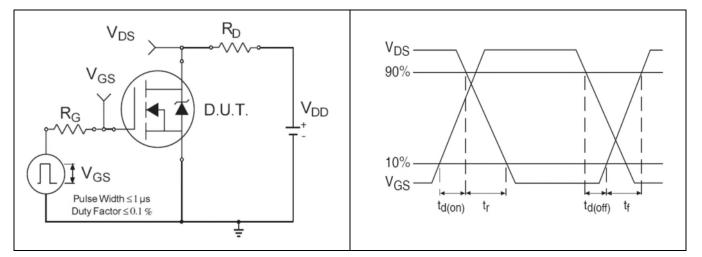


Figure 17 Switching Time Test Circuit


Figure 18 Switching Time Waveforms



Package Outline

5 Package Outline

Note: For the most updated package outline, please see the website: TO-257AA

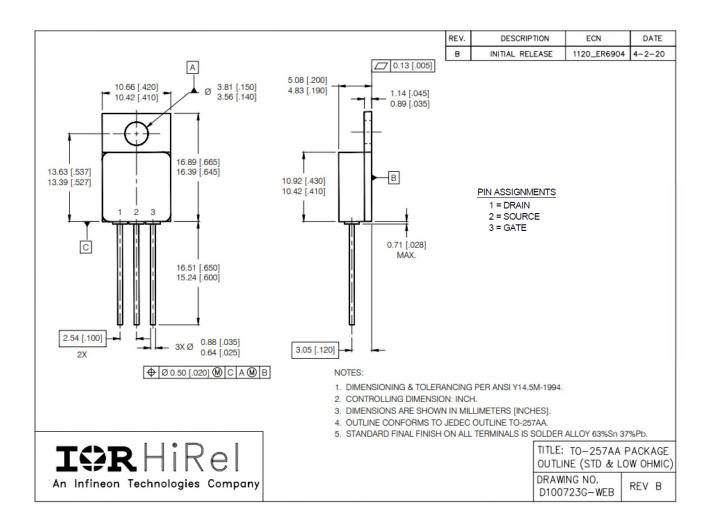

BERYLLIA WARNING PER MIL-PRF-19500

Package containing beryllia shall not be ground, sandblasted, machined, or have other operations performed on them which will produce beryllia or beryllium dust. Furthermore, beryllium oxide packages shall not be placed in acids that will produce fumes containing beryllium.

Radiation Hardened Power MOSFET Thru-Hole (TO-257AA)



Revision history

Revision history

Document version	Date of release	Description of changes
	12/12/2001	Datasheet (PD-91273C)
Rev D	04/05/2006	Updated QPL part number
Rev E	05/16/2006	Updated 600kRad(si) to 500kRad(si)
Rev F	05/25/2022	Updated based on ECN-1120_09018
Rev G	10/14/2022	Updated based on ECN-1120_08924

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2022-10-14

Published by

International Rectifier HiRel Products, Inc.

An Infineon Technologies company El Segundo, California 90245 USA

© 2022 Infineon Technologies AG. All Rights Reserved.

Do you have a question about this document?

Email: erratum@infineon.com

Document reference

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest International Rectifier HiRel Products, Inc., an Infineon Technologies company, office.

International Rectifier HiRel Components may only be used in life-support devices or systems with the expressed written approval of International Rectifier HiRel Products, Inc., an Infineon Technologies company, if failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety and effectiveness of that device or system.

Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.