

1234567





| SIGN                                           | DATE       | DESCRIPTION                                           | APPROVER |
|------------------------------------------------|------------|-------------------------------------------------------|----------|
| △                                              | 2011.08.24 | The dimension is changed from 15.24mm to 15.00±0.20mm | Aaron    |
| △                                              | 2011.08.24 | The dimension are added                               | Aaron    |
| △                                              | 2011.08.24 | The dimension is changed from 15.24mm to 15.00mm      | Aaron    |
| THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! |            |                                                       |          |

#### Material

- Item ① Short male Contact pin: Copper ,Tin plated
- Item ② Long male Contact pin: Copper ,Tin plated
- Item ③ Terminal (housing): Thermoplastic (UL94V-0)

#### Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 
- Critical dimension: ▽

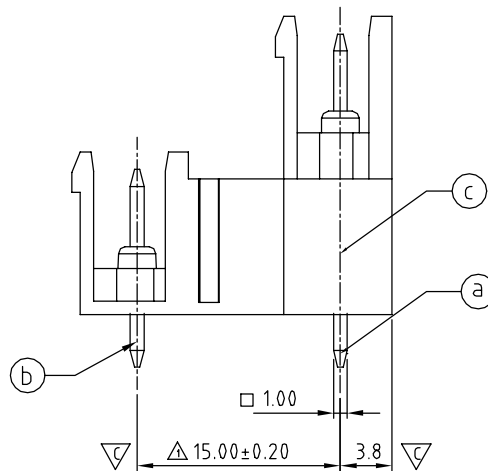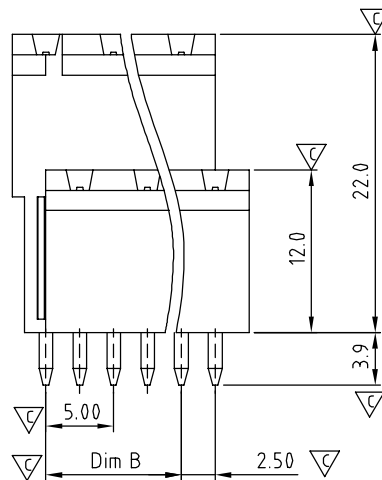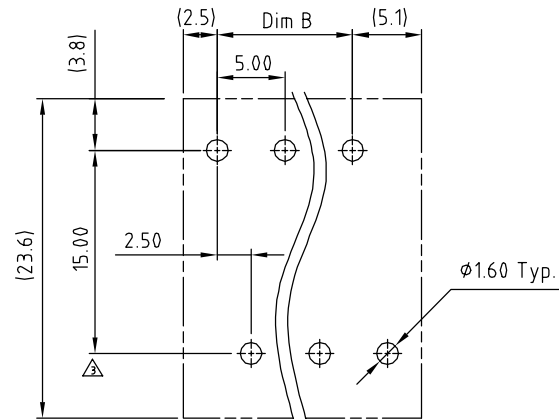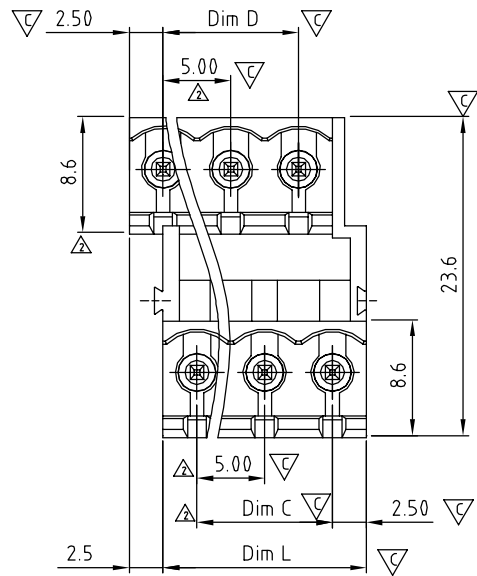

VF xx 70 x 0 xxxx G

| Poles        | Color               | RoHS                                                                   |
|--------------|---------------------|------------------------------------------------------------------------|
| 04 2×2Poles  |                     | Pb<40,000ppm                                                           |
| 06 2×3Poles  |                     | 0000 Standard @ Logo                                                   |
| ... ..       |                     | 000A Standard ANY Logo                                                 |
| 48 2×24Poles |                     | Any special item by customer request, please contact sales department. |
|              | 0 Black (RAL9005)   |                                                                        |
|              | 2 Red (RAL3001/D)   |                                                                        |
|              | 3 Orange(RAL2011/P) |                                                                        |
|              | 4 Yellow(RAL1018/A) |                                                                        |
|              | 5 Green(RAL6018/T)  |                                                                        |
|              | 6 Blue (RAL5015/A)  |                                                                        |
|              | 8 Grey(RAL7035/D)   |                                                                        |
|              | 9 White(RAL1102)    |                                                                        |
|              | C Green(RAL6018/U)  |                                                                        |

N=NUMBER OF CONTACTS

| Dimension |             | TOL       |            |             |             |             |
|-----------|-------------|-----------|------------|-------------|-------------|-------------|
|           |             | 2×2P-2×5P | 2×6P-2×10P | 2×11P-2×15P | 2×16P-2×20P | 2×21P-2×24P |
| Dim L     | N/2×5.0     | ±0.15     | ±0.20      | ±0.25       | ±0.30       | ±0.35       |
| Dim B     | (N/2-1)×5.0 | ±0.15     | ±0.20      | ±0.25       | ±0.30       | ±0.35       |
| Dim C     | (N/2-1)×5.0 | ±0.15     | ±0.20      | ±0.25       | ±0.30       | ±0.35       |
| Dim D     | (N/2-1)×5.0 | ±0.15     | ±0.20      | ±0.25       | ±0.30       | ±0.35       |

# ANYTEK

## CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

|          |                                             |                     |                       |                                                                                       |            |
|----------|---------------------------------------------|---------------------|-----------------------|---------------------------------------------------------------------------------------|------------|
| TITLE    | VF-5.00 Series 2×2P-2×24P ( Open ) Vertical |                     |                       |                                                                                       |            |
| PART NO. | VFxx70x0xxxxG                               |                     |                       | DWG NO.                                                                               | 8VF0004    |
| APPROVED | CHECKED                                     | DESIGNED            | DRAWN                 | CUST NO.                                                                              |            |
|          |                                             | Aaron<br>2011.08.24 | Chen Bo<br>2011.02.21 |  | Tolerance  |
|          |                                             |                     |                       | UNIT: mm                                                                              | X. ±0.50   |
|          |                                             |                     |                       | SCALE: NONE                                                                           | X.X ±0.30  |
|          |                                             |                     |                       | SHEET: 01/01                                                                          | X.XX ±0.10 |
|          |                                             |                     |                       | REV.: C                                                                               | X° ±1°     |

1234567